

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 July 2003 (03.07.2003)


PCT

(10) International Publication Number
WO 03/053297 A2

- (51) International Patent Classification⁷: **A61F 13/00** (72) Inventors: **BEITZ, Mark, J.**; 1102 West Lorain Street, Appleton, WI 54914 (US). **ABUTO, Frank, Paul**; 515 Oakmont Hill, Duluth, GA 30097 (US). **CHAKRAVARTY, Jayant**; W6865 Hazelnut Lane, Appleton, WI 54915 (US). **GARVEY, Michael, Joseph**; 309 North Drew Street, Appleton, WI 54911 (US). **RYMER, Timothy, J.**; 2111 East Lucille Street, Appleton, WI 54915 (US). **VENTURINO, Michael, Barth**; 2124 Omega Drive, Appleton, WI 54915 (US). **VOGT, Robert, E.**; 1121 Gay Drive, Neenah, WI 54956 (US). **KRESSNER, Bernhardt, E.**; 525 North Bateman Street, Appleton, WI 54911 (US).
- (21) International Application Number: **PCT/US02/40779**
- (22) International Filing Date:
17 December 2002 (17.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|------------|-------------------------------|----|
| 10/034,079 | 20 December 2001 (20.12.2001) | US |
| 10/034,021 | 20 December 2001 (20.12.2001) | US |
| 10/033,860 | 20 December 2001 (20.12.2001) | US |
| 10/037,385 | 20 December 2001 (20.12.2001) | US |
| 10/306,201 | 27 November 2002 (27.11.2002) | US |
| 10/306,095 | 27 November 2002 (27.11.2002) | US |
| 10/306,097 | 27 November 2002 (27.11.2002) | US |
- (74) Agents: **BRIDGE, Richard, L.** et al.; **SENNIGER, POWERS, LEAVITT & ROEDEL**, One Metropolitan Square, 16th Floor, St. Louis, MO 63102 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).

[Continued on next page]

(54) Title: **ABSORBENT ARTICLE WITH STABILIZED ABSORBENT STRUCTURE**

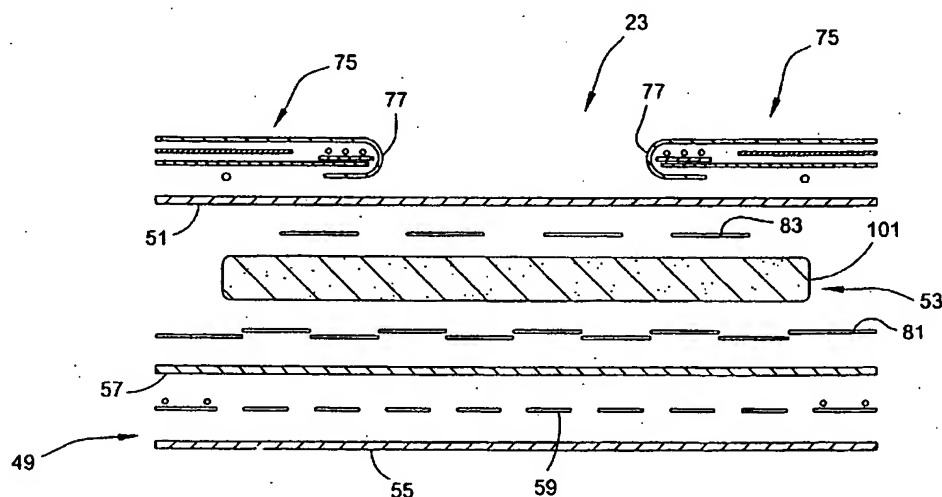

(57) Abstract: An absorbent article having a liner and an outer cover in generally opposed relationship with the liner. An absorbent body disposed therebetween includes a non-woven absorbent structure having a length, a width and a thickness. The absorbent structure is constructed of absorbent fibers and binder fibers activatable to form inter-fiber bonds within the absorbent structure, with the binder fibers being multi-component fibers in which at least one binder fiber component has a melt temperature that is lower than a melt temperature of at least one other binder fiber component. The width of the absorbent structure is non-uniform along its length prior to activation of the binder fibers. In another embodiment, the absorbent structure is of unitary construction and the concentration of binder fibers therein is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

WO 03/053297 A2



SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ABSORBENT ARTICLE WITH STABILIZED ABSORBENT STRUCTURECROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part patent application of U.S. patent applications Serial Nos.

5 10/034,079 entitled Targeted Bonding Fibers for Stabilized Absorbent Structures; 10/034,021 entitled Absorbent Structures Having Low Melting Fibers; 10/037,385 entitled Method and Apparatus for Making On-Line Stabilized Absorbent Materials; and 10/033,860 entitled Targeted On-Line

10 Stabilized Absorbent Structures; all of which were filed on December 20, 2001 and are fully incorporated herein by reference.

BACKGROUND OF THE INVENTION

15 The present invention relates generally to absorbent articles, such as those used as personal care products, and more particularly to such an absorbent article having an absorbent body comprised at least in part of a stabilized non-woven absorbent structure.

20 Absorbent articles find widespread use as personal care products such as diapers, children's toilet training pants, adult incontinence garments, medical garments, sanitary napkins and the like, as well as surgical bandages and sponges. These articles absorb and contain body waste and

25 are typically disposable in the sense that they are intended to be discarded after a limited period of use; i.e., the articles are not intended to be laundered or otherwise restored for reuse. Conventional disposable absorbent articles comprise an absorbent body disposed between a liner

30 adapted for contiguous relationship with the wearer's skin and an outer cover for inhibiting liquid body waste absorbed by the absorbent body from leaking out of the article. The liner of the absorbent article is typically liquid permeable

to permit liquid body waste to pass therethrough for absorption by the absorbent body.

In one general practice of forming fibrous webs (commonly referred to as airforming) for use as an absorbent body in such absorbent articles, discrete fibers such as
5 cellulosic or other suitable absorbent fibers are introduced into an airforming device along with particulate or fibrous superabsorbent material. The absorbent fibers and superabsorbent particles are entrained in an air stream
10 within the airforming device and directed onto a foraminous forming surface upon which the mixture of absorbent fibers and superabsorbent particles are collected to form an absorbent fibrous web or structure.

Airforming devices employed in high-speed commercial
15 operations typically have a forming surface constructed of a wire screen or fluted grid, and one or more form members which, together with the wire screen or fluted grid, generally define the length, width and thickness profiles of the absorbent structure to be formed on the forming surface.
20 A pneumatic flow mechanism, such as a vacuum suction system, draws the air-entrained fiber stream within the airforming device onto the forming surface, and pass the airflow through the forming surface has been employed in high-speed commercial operations. By using such an airforming device,
25 absorbent structures have been formed with gradations in basis weight (e.g., thickness) along the length and/or width of the absorbent structure, and have also been formed to have a generally non-uniform width.

While airformed absorbent structures that comprise a
30 mixture of absorbent fibers and superabsorbent material have proven useful in making absorbent bodies of preferred shapes and sizes for various absorbent articles, further improvement is desired. More particularly, such absorbent structures lack the structural integrity or stability to maintain its

original shape (e.g., length, width and particularly thickness) following repeated liquid insults by the wearer.

To this end, it is known to use a conventional airlaying process to form a stabilized absorbent web or structure in which binder materials have been added to the structure. Such binder materials have included adhesives, powders, netting, and binder fibers. The binder fibers have included one or more of the following types of fibers: homofilaments, heat-fusible fibers, bicomponent fibers, meltblown polyethylene fibers, meltblown polypropylene fibers, and the like.

In conventional airlaying systems, binder fibers are mixed with absorbent fibers and superabsorbent materials and the mixture is then deposited onto a porous forming surface by using a vacuum system to draw the fibers onto the forming surface. The structure formed on the forming surface is then heated to activate the binder fibers whereby at least a portion of the binder fibers melt and form inter-fiber bonds with the absorbent fibers to form a stabilized structure.

Such conventional airlaying systems, however, have been limited with regard to the lengths of the binder fibers that can be efficiently employed. In the operation of the conventional systems, the lengths of the binder fibers have typically been 6 mm or less. Attempts to use longer binder fibers have caused plugging of distribution screens, non-uniform distribution of fibers, fiber clumping, and other basis weight uniformity problems. Such airlaying systems have also required the use of excessive amounts of energy. Where the binder fibers are heat-activated to provide the stabilized web structure, it has been necessary to subject the structure to an excessively long heating time to adequately heat the binder fibers. For instance, typical heating times with through-air bonding systems are in the range of 7-8 seconds. Additionally, it has been necessary to subject the fibrous web to an excessively long cooling time,

such as during roll storage in warehouses, to establish and preserve the desired stabilized structure prior to further processing operations.

As a result, conventional airlaying systems have been
5 inadequate for manufacturing stabilized absorbent structures directly in-line on consumer product converting machines at high-speeds. Rather, where stabilized absorbent structures are desired for use in making absorbent bodies for absorbent articles, the common approach has been to manufacture wider
10 than needed stabilized webs off-line whereby the webs are rolled and stored for subsequent use in separate manufacturing machines.

One particular disadvantage of such an approach is that conventional airlaying systems are limited as to dimensioning
15 of the stabilized structure formed thereby. More particularly, the stabilized structure formed by existing airlaying systems has both a uniform width (e.g., straight side edges) and a substantially uniform basis weight and thickness. Where a shaped absorbent structure having a non-
20 uniform width is desired, such as an absorbent structure having a narrowed crotch region, the previously formed stabilized web must be unrolled and the side edges of the web must be cut to provide the desired width profile. Such cutting and shaping of the selected segments of the
25 stabilized web results in excessive wasted amounts of the stabilized web, and has excessively complicated the manufacturing operations. In addition, conventional systems have resulted in excessive costs associated with the shipping, storage, and roll handling of the relatively low
30 density materials.

Also, where a non-uniform basis weight or thickness is desired, e.g., to provide the absorbent structure with a targeted area of increased basis weight for increased absorbing capacity, a smaller (e.g., narrower) layer must be

cut from one stabilized web and then overlaid and bonded onto a larger stabilized web to increase the basis weight of the absorbent structure at the targeted area. This requires additional steps and even further complicates manufacturing
5 operations.

SUMMARY OF THE INVENTION

In general, one embodiment of an absorbent article of the present invention comprises a liner adapted for
10 contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a thickness, a width and opposite side edges
15 generally defining the width of the structure. The thickness of the absorbent structure is non-uniform along at least one of the length and the width of the absorbent structure and the opposite side edges of the absorbent structure are substantially uncut along the length of the absorbent
20 structure. The absorbent structure is of unitary construction and comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure.

In another embodiment, the absorbent article generally
25 comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure comprising absorbent fibers and
30 binder fibers activated to form inter-fiber bonds within the absorbent structure. The binder fibers are multi-component fibers in which at least one binder fiber component has a melt temperature that is lower than a melt temperature of at least one other binder fiber component. The absorbent

structure has a length, a thickness, a width and opposite side edges generally defining the width of the structure. The width of the absorbent structure is non-uniform along the length of the absorbent structure and the opposite side edges of the absorbent structure are substantially uncut along the length of the absorbent structure.

In another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a thickness, and a width. The thickness of the absorbent structure is non-uniform along at least one of the length and the width of the absorbent structure. The absorbent structure is of unitary construction and comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure. The absorbent structure is unmolded during and after activation of the binder fibers.

In yet another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a width, and a basis weight. The width of the absorbent structure is non-uniform along the length of the non-woven structure and the basis weight of the absorbent structure is non-uniform along at least one of the length and the width of the absorbent structure. The absorbent structure is of unitary construction and comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure. The absorbent structure has opposite

major faces which are substantially unmolded during and after activation of the binder fibers.

In still another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure. The binder fibers are multi-component fibers in which at least one binder fiber component has a melt temperature that is lower than a melt temperature of at least one other binder fiber component. The absorbent structure has a length, a thickness, a width and opposite side edges generally defining the width of the structure, the width of the absorbent structure being non-uniform along the length of the absorbent structure and the side edges each having a surface contour no portion of which is concave.

In another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a thickness, a width, opposite side edges generally defining the width of the structure, and opposite major surfaces. The thickness of the absorbent structure is non-uniform across the width of the structure along at least a portion of the length of the structure. The absorbent structure has a brightness gradient across its width at said portion in the range of about 0.5 to about 3.0 gray units/mm as determined by an absorbent structure brightness test.

In yet another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a thickness, a width and opposite side edges generally defining the width of the structure. The width of the absorbent structure is non-uniform along the length of the absorbent structure and the side edges of the absorbent structure have an edge brightness profile defined by a second order polynomial function as determined by an edge brightness test. The function has a coefficient "a" of the X^2 term in the range of about -15 to about 20 and a coefficient "b" of the X term in the range of about 10 to about 40.

In general, another embodiment of an absorbent article of the present invention comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure of unitary construction. The absorbent structure comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, and has a length, a width, a thickness and a permeability throughout the absorbent structure of greater than about 20 square microns. The thickness of the absorbent structure is non-uniform along at least one of the length and the width of the absorbent structure.

In another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-

woven absorbent structure of unitary construction. The absorbent structure comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, and has a length, a width, a thickness and a permeability throughout the absorbent structure of greater than about 20 square microns. The absorbent structure also has a density that is non-uniform along at least one of the length and the width of the absorbent structure.

10 In still another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and
15 comprises a non-woven absorbent structure of unitary construction. The absorbent structure comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, and has a length, a width, a thickness and a permeability throughout the absorbent
20 structure of greater than about 20 square microns. The concentration of binder fibers within the absorbent structure is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

In general, another one embodiment of an absorbent
25 article of the present invention comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover. The absorbent body comprises a non-woven absorbent
30 structure having a unitary construction and comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure. The absorbent structure has a length, a width and a thickness, the concentration of binder fibers within the absorbent structure

being non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

In another embodiment, an absorbent article comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a width, a thickness and opposite major faces. The absorbent structure comprises absorbent fibers and binder fibers, the binder fibers being multi-component fibers in which at least one binder fiber component has a melt temperature which is lower than a melt temperature of at least one other binder fiber component. The binder fibers have a substantially random orientation at the major faces of the absorbent structure.

In yet another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a width and a thickness. The absorbent structure comprises absorbent fibers and binder fibers activatable to form inter-fiber bonds within the absorbent structure, the binder fibers being multi-component fibers in which at least one binder fiber component has a melt temperature which is lower than a melt temperature of at least one other binder fiber component. The width of the absorbent structure is non-uniform along the length of the absorbent structure prior to activation of the binder fibers.

In still another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent

body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a width and a thickness. The absorbent structure comprises absorbent fibers, superabsorbent material and binder fibers
5 activatable to form inter-fiber bonds within the absorbent structure, the superabsorbent material being distributed within the absorbent structure substantially across the full width of the absorbent structure. The width of the absorbent structure is non-uniform along the length of the absorbent
10 structure prior to activation of the binder fibers.

In another embodiment, the absorbent article generally comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed
15 between the liner and the outer cover and comprises a non-woven absorbent structure having a length, a width, a thickness and opposite major faces. The absorbent structure comprises absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, the
20 thickness of the absorbent structure being non-uniform along at least one of the length and the width of the absorbent structure. The binder fibers have a substantially random orientation at the major faces.

In another embodiment, the absorbent article generally
25 comprises a liner adapted for contiguous relationship with the wearer's body and an outer cover in generally opposed relationship with the liner. An absorbent body is disposed between the liner and the outer cover and comprises a non-woven absorbent structure of unitary construction and
30 comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure. The absorbent structure has a length, a width and a thickness, the binder fibers comprising greater than zero percent and

less than about five percent of the weight of the absorbent structure.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig. 1 is a plan view of an absorbent article of the present invention illustrated in the form of a diaper shown unfastened and laid flat;

 Fig. 2 is an exploded cross section taken generally in the plane including line 2-2 of Fig. 1;

10 Fig. 3 is a perspective view of the diaper shown as worn;

 Fig. 4 is a longitudinal cross-section of an absorbent structure of the diaper of Fig. 1 taken generally on the longitudinal axis thereof;

15 Fig. 5 is a schematic perspective of apparatus for forming an absorbent structure of the present invention;

 Fig. 6 is an enlarged side elevation of an airforming device of the apparatus of FIG. 5;

20 Fig. 7 is a fragmentary cross-section of the airforming device of FIG. 6;

 Fig. 8 is a schematic perspective of a forming drum and forming surface of the airforming device of FIG. 6;

 Fig. 9 is an enlarged schematic of a portion of the forming drum and forming surface;

25 Fig. 10 is a schematic perspective of a longitudinal cross-section taken through a portion of the forming drum and forming surface;

 Fig. 11 is a schematic cross-sectional profile of a cut side edge of a prior art stabilized absorbent structure;

30 Fig. 12 is a schematic cross-sectional profile of an uncut side edge of a stabilized absorbent structure of the present invention;

 Fig. 13 is a photograph of the cross-sectional profile of Fig. 12;

Fig. 14 is a photograph of the cross-sectional profile of Fig. 11;

FIG. 15 is a cross-section of a permeability test apparatus; and

5 FIG. 16 is cross-section taken in the plane of line 16-16 of Fig. 15.

Corresponding reference characters indicate corresponding parts throughout the several views of the drawings.

10

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings and in particular to Fig. 1, one example of an absorbent article constructed in accordance with the present invention is illustrated in the form of a diaper, which is indicated in its entirety by the reference numeral 21. As used herein, an absorbent article refers to an article which may be placed against or in proximity to the body of the wearer (e.g., contiguous to the body) to absorb and/or retain various waste discharged from the body. Some absorbent articles, such as disposable absorbent articles, are intended to be discarded after a limited period of use instead of being laundered or otherwise restored for reuse. It is contemplated, however, that the principles of the present invention have application in garments (including reusable garments) and other absorbent articles. For example, the principles of the present invention may be incorporated into children's training pants and other infant and child care products, adult incontinence garments and other adult care products, medical garments, sanitary napkins and other feminine care products and the like, as well as surgical bandages and sponges.

15
20
25
30

The diaper 21 is shown in Fig. 1 in an unfolded and laid-flat condition to illustrate a longitudinal axis X and a lateral axis Y of the diaper. The diaper 21 generally

comprises a central absorbent assembly 23 extending longitudinally from a front (e.g., anterior) region 25 of the diaper through a crotch (e.g., central) region 27 to a back (e.g., posterior) region 29 of the diaper. The central
5 absorbent assembly 23 is generally I-shaped, and more particularly hourglass shaped, and has contoured, laterally opposite side edges 31 and longitudinally opposite front and rear waist edges or ends, respectively designated 33 and 35. It is understood, however, that the diaper 21 may have other
10 shapes, such as a rectangular shape or a T-shape without departing from the scope of the present invention. The side edges 31 of the diaper 21 extend longitudinally from the front region 25 through the crotch region 27 to the back region 29 for forming transversely spaced leg openings 37
15 (Fig. 3) of the diaper when worn.

The front region 25 generally includes the portions of the central absorbent assembly 23 which extend over the wearer's lower abdominal region and the back region 29 generally includes the portions of the central absorbent
20 assembly which extend over the wearer's lower back region. The crotch region 27 includes the portion extending longitudinally through the wearer's crotch from the front region 25 to the back region 29 and laterally between the wearer's legs. As worn on the wearer's body (Fig. 3), the
25 diaper 21 further defines a central waist opening 43 and the leg openings 37.

With particular reference to Fig. 2, the central absorbent assembly 23 of the diaper 21 comprises an outer cover, generally indicated at 49, a bodyside liner 51
30 positioned in facing relation with the outer cover, and an absorbent body, generally indicated at 53, disposed between the outer cover and the liner. The outer cover 49 of the illustrated embodiment generally defines the length and width of the diaper 21. The absorbent body 53 has a length and

width which are less than the respective length and width of the outer cover 49 such that the outer cover extends both longitudinally and laterally out beyond the sides and ends of the absorbent body. The bodyside liner 51 may be generally coextensive with the outer cover 49, or may instead overlies an area which is larger (and would thus generally define the length and/or width of the diaper 21) or smaller than the area of the outer cover 49, as desired. In other words, the bodyside liner 51 is preferably in superposed relation with the outer cover 49 but may not necessarily be coextensive with the outer cover.

In one embodiment, the outer cover 49 is stretchable and may or may not be somewhat elastic. More particularly, the outer cover 49 is sufficiently extensible such that once stretched under the weight of the insulted absorbent body, the outer cover will not retract substantially back toward its original position. However, it is contemplated that the outer cover 49 may instead be generally non-extensible and remain within the scope of this invention.

The outer cover 49 may be a multi-layered laminate structure to provide desired levels of extensibility as well as liquid impermeability and vapor permeability. For example, the outer cover 49 of the illustrated embodiment is of two-layer construction, including an outer layer 55 constructed of a vapor permeable material and an inner layer 57 constructed of a liquid impermeable material, with the two layers being secured together by a suitable laminate adhesive 59. It is understood, however, that the outer cover 49 may instead be constructed of a single layer of liquid impermeable material, such as a thin plastic film constructed of materials such as those from which the inner layer 57 is constructed as described later herein, without departing from the scope of this invention. The liquid impermeable inner

layer 57 of the outer cover 49 can be either vapor permeable (i.e., "breathable") or vapor impermeable.

The bodyside liner 51 is preferably pliable, soft feeling, and nonirritating to the wearer's skin, and is employed to help isolate the wearer's skin from the absorbent body 53. The liner 51 is less hydrophilic than the absorbent body 53 to present a relatively dry surface to the wearer, and is sufficiently porous to be liquid permeable to thereby permit liquid to readily penetrate through its thickness. A suitable bodyside liner 51 may be manufactured from a wide selection of web materials, but is preferably capable of stretching in at least one direction (e.g., longitudinal or lateral). In particular embodiments, the bodyside liner 51 is desirably extensible and capable of extending along with the outer cover 49 for desired fit of the diaper on the wearer.

Fastener tabs 65 (Figs. 1 and 3) are secured to the central absorbent assembly 23 generally at the back region 29 thereof with the tabs extending laterally out from the opposite side edges 31 of the assembly. The fastener tabs 65 may be attached to the outer cover 49, to the bodyside liner 51, between the outer cover and liner, or to other components of the diaper 21. The tabs 65 may also be elastic or otherwise rendered elastomeric. For example, the fastener tabs 65 may be an elastomeric material such as a neck-bonded laminate (NBL) or stretch-bonded laminate (SBL) material.

Methods of making such materials are well known to those skilled in the art and are described in U.S. Patent No. 4,663,220 issued May 5, 1987 to Wisneski et al., U.S. Patent No. 5,226,992 issued July 13, 1993 to Morman, and European Patent Application No. EP 0 217 032 published on April 8, 1987 in the names of Taylor et al., the disclosures of which are hereby incorporated by reference. Examples of articles that include selectively configured fastener tabs are

described in U.S. Patent No. 5,496,298 issued March 5, 1996 to Kuepper et al.; U.S. Patent No. 5,540,796 to Fries; and U.S. Patent No. 5,595,618 to Fries; the disclosures of which are also incorporated herein by reference. Alternatively, 5 the fastener tabs 65 may be formed integrally with a selected diaper component. For example, the tabs 65 may be formed integrally with the inner or outer layer 57, 55 of the outer cover 49, or with the bodyside liner 51.

Fastening components, such as hook and loop fasteners, 10 designated 71 and 72 respectively, are employed to secure the diaper 21 on the body of a child or other wearer. Alternatively, other fastening components (not shown), such as buttons, pins, snaps, adhesive tape fasteners, cohesives, mushroom-and-loop fasteners, or the like, may be employed. 15 Desirably, the interconnection of the fastening components 71, 72 is selectively releasable and re-attachable. In the illustrated embodiment, the hook fasteners 71 are secured to and extend laterally out from the respective fastener tabs 65 at the back region 29 of the diaper 21. However, it is 20 understood that the fastener tabs 65 may be formed of a hook material and thus comprise the hook fasteners 71 without departing from the scope of this invention. The loop fastener 72 of the illustrated embodiment is a panel of loop material secured to the outer cover 49 at the front region 25 25 of the diaper 21 to provide a "fasten anywhere" mechanical fastening system for improved fastening of the hook fasteners 71 with the loop fastener.

The loop material may include a pattern-unbonded non-woven fabric having continuous bonded areas that define a 30 plurality of discrete unbonded areas. The fibers or filaments within the discrete unbonded areas of the fabric are dimensionally stabilized by the continuous bonded areas that encircle or surround each unbonded area, such that no support or backing layer of film or adhesive is required. The

unbonded areas are specifically designed to afford spaces between fibers or filaments within the unbonded areas that remain sufficiently open or large to receive and engage hook elements of the complementary hook fasteners 71. In particular, a pattern-unbonded non-woven fabric or web may include a spunbond non-woven web formed of single component or multi-component melt-spun filaments. For example, the loop material may be a laminated structure including a polyethylene component and a polypropylene component adhesively bonded together with the polypropylene component facing outward away from the outer cover 49 to receive the hook fasteners 71. Examples of suitable pattern-unbonded fabrics are described in U.S. patent No. 5,858,515 issued January 12, 1999 to T. J. Stokes et al. and entitled PATTERN-UNBONDED NON-WOVEN WEB AND PROCESS FOR MAKING THE SAME; the entire disclosure of which is incorporated herein by reference in a manner that is consistent herewith.

The diaper 21 shown in Fig. 1 also comprises a pair of containment flaps, generally indicated at 75, configured to provide a barrier to the lateral flow of body exudates. The containment flaps 75 are located generally adjacent the laterally opposite side edges 31 of the diaper 21 and, when the diaper is laid flat as shown in Figs. 1 and 2, extend inward toward the longitudinal axis X of the diaper. Each containment flap 75 typically has a free, or unattached end 77 free from connection with the bodyside liner 51 and other components of the diaper 21. Elastic strands 79 disposed within the flaps 75 adjacent the unattached ends thereof urge the flaps toward an upright, perpendicular configuration in at least the crotch region 27 of the diaper 21 to form a seal against the wearer's body when the diaper is worn. The containment flaps 75 may extend longitudinally the entire length of the absorbent body 53 or they may extend only partially along the length of the absorbent body. When the

containment flaps 75 are shorter in length than the absorbent body 53, the flaps can be selectively positioned anywhere between the side edges 31 of the diaper 21 in the crotch region 27. In a particular aspect of the invention, the
5 containment flaps 75 extend the entire length of the absorbent body 53 to better contain the body exudates.

Such containment flaps 75 are generally well known to those skilled in the art and therefore will not be further described herein except to the extent necessary to describe
10 the present invention. As an example, suitable constructions and arrangements for containment flaps 75 are described in U.S. Patent No. 4,704,116 issued November 3, 1987, to K. Enloe, the disclosure of which is hereby incorporated by reference. The diaper 21 may also incorporate other
15 containment components in addition to or instead of the containment flaps 75. For example, while not shown in the drawings, other suitable containment components may include, but are not limited to, elasticized waist flaps, foam dams in the front, back and/or crotch regions, and the like.

20 The various components of the diaper 21 are assembled together using a suitable form of attachment, such as adhesive, sonic bonds, thermal bonds or combinations thereof. In the illustrated embodiment, the outer cover 49 and absorbent body 53 are secured to each other with lines of
25 adhesive 81, such as a hot melt or pressure-sensitive adhesive. The bodyside liner 51 is also secured to the outer cover 49 and may also be secured to the absorbent body 53 using the same forms of attachment.

The bodyside liner 51 may be secured to the outer cover
30 49 at the lateral edge margins of the crotch region 27, but at least the central portion is free of such connection. Rather than being entirely free of such connection, the bodyside liner 51 may be secured to the absorbent body 53 in the crotch region 27 by a light adhesive 83 which will break

away in use. Preferably, securement of the bodyside liner 51 to the outer cover 49 is limited to overlying peripheral edge margins of the two to promote independent stretching movement of the liner and cover relative to each other. If the diaper 5 21 is to be sold in a pre-fastened condition, the diaper may also have passive bonds (not shown) which join the back region 29 with the front region 25.

The diaper 21 can also include a surge management layer (not shown) which helps to decelerate and diffuse surges or 10 gushes of liquid that may be rapidly introduced into the absorbent body 53. Desirably, the surge management layer can rapidly accept and temporarily hold the liquid prior to releasing the liquid to the absorbent structure. In the illustrated embodiment, for example, a surge layer can be 15 located between the absorbent body 53 and the bodyside liner 51. Examples of suitable surge management layers are described in U.S. Pat. No. 5,486,166 entitled FIBROUS NON-WOVEN WEB SURGE LAYER FOR PERSONAL CARE ABSORBENT ARTICLES AND THE LIKE by C. Ellis and D. Bishop, which issued Jan. 23, 20 1996, and U.S. Pat. No. 5,490,846 entitled IMPROVED SURGE MANAGEMENT FIBROUS NON-WOVEN WEB FOR PERSONAL CARE ABSORBENT ARTICLES AND THE LIKE by C. Ellis and R. Everett, which issued Feb. 13, 1996, the entire disclosures of which are hereby incorporated by reference in a manner that is 25 consistent herewith.

To provide improved fit and to help further reduce leakage of body exudates from the diaper 21, elastic components are typically incorporated therein, particularly at the waist area and the leg areas. For example, the diaper 30 21 of the illustrated embodiment has waist elastic components 85 (Fig. 3) and leg elastics 87 (Figs. 1 and 2). The waist elastic components 85 are configured to gather and shirr the end margins of the diaper 21 to provide a resilient, comfortable close fit around the waist of the wearer and the

leg elastics 87 are configured to gather and shirr the side margins of the diaper at the leg openings 37 to provide a close fit around the wearer's legs.

Examples of other diaper 21 configurations suitable for use in connection with the instant application that may or may not include diaper components similar to those described previously are described in U.S. Patent No. 4,798,603 issued January 17, 1989, to Meyer et al.; U.S. Patent No. 5,176,668 issued January 5, 1993, to Bernardin; U.S. Patent No. 5,176,672 issued January 5, 1993, to Bruemmer et al.; U.S. Patent No. 5,192,606 issued March 9, 1993, to Proxmire et al., U.S. Patent No. 5,509,915 issued April 23, 1996 to Hanson et al., U.S. Patent No. 5,993,433 issued November 30, 1999 to St. Louis et al., and U.S. Patent No. 6,248,097 issued June 19, 2001 to Beitz et al., the disclosures of which are herein incorporated by reference.

In accordance with the present invention, the absorbent body 53 at least in part comprises a stabilized non-woven absorbent structure 101 (Fig. 4) formed from a mixture of absorbent fibers, superabsorbent material (the absorbent fibers and superabsorbent material together broadly defining an absorbent material within the absorbent structure) and binder fibers (broadly, a binding material) which are activatable as will be described to form inter-fiber bonds within the absorbent structure for stabilizing the absorbent structure. The absorbent fibers may be provided by various types of wettable, hydrophilic fibrous material. For example, suitable absorbent fibers include naturally occurring organic fibers composed of intrinsically wettable material, such as cellulosic fibers; synthetic fibers composed of cellulose or cellulose derivatives, such as rayon fibers; inorganic fibers composed of an inherently wettable material, such as glass fibers; synthetic fibers made from inherently wettable thermoplastic polymers, such as

particular polyester or polyamide fibers; and synthetic fibers composed of a nonwetable thermoplastic polymer, such as polypropylene fibers, which have been hydrophilized by appropriate means. The fibers may be hydrophilized, for
5 example, by treatment with silica, treatment with a material that has a suitable hydrophilic moiety and is not readily removable from the fiber, or by sheathing the nonwetable, hydrophobic fiber with a hydrophilic polymer during or after the formation of the fiber. For the present invention, it is
10 contemplated that selected blends of the various types of fibers mentioned above may also be employed.

Suitable sources of absorbent fibers may include cellulosic fibers including: wood fibers, such as bleached kraft softwood or hardwood, high-yield wood fibers, and
15 ChemiThermoMechanical Pulp fibers; bagasse fibers; milkweed fluff fibers; wheat straw; kenaf; hemp; pineapple leaf fibers; or peat moss. High-yield fibers, such as BCTMP (Bleached ChemiThermal Mechanical Pulp) fibers, can be flash-dried and compressed into densified pads. The high-yield
20 fiber can expand to a higher loft when wetted, and can be used for the absorbent fiber material. Other absorbent fibers, such as regenerated cellulose and curled chemically stiffened cellulose fibers may also be densified to form absorbent structures that can expand to a higher loft when
25 wetted.

As an example, suitable wood pulps include standard softwood fluffing grade such as NB-416 (Weyerhaeuser Corporation, Tacoma, Washington, U.S.A.) and CR-1654 (US
Alliance Pulp Mills, Coosa, Alabama, U.S.A.), bleached kraft
30 softwood or hardwood, high-yield wood fibers, ChemiThermoMechanical Pulp fibers and Bleached Chemithermal Mechanical Pulped (BCTMP). Pulp may be modified in order to enhance the inherent characteristics of the fibers and their processability. Curl may be imparted to the fibers by

conventional methods including chemical treatment or mechanical twisting. Pulps may also be stiffened by the use of crosslinking agents such as formaldehyde or its derivatives, glutaraldehyde, epichlorohydrin, methylolated compounds such as urea or urea derivatives, dialdehydes such as maleic anhydride, non-methylolated urea derivatives, citric acid or other polycarboxylic acids. Some of these agents are less preferable than others due to environmental and health concerns.

- 10 Pulp may also be stiffened by the use of heat or caustic treatments such as mercerization. Examples of these types of fibers include NHB416 which is a chemically crosslinked southern softwood pulp which enhances wet modulus, available from the Weyerhaeuser Corporation of Tacoma, Washington, U.S.A. Other useful pulps are debonded pulp (NF405) also from Weyerhaeuser. HPZ3 from Buckeye Technologies, Inc of Memphis, Tennessee, U.S.A., has a chemical treatment that sets in a curl and twist, in addition to imparting added dry and wet stiffness and resilience to the fiber. Another suitable pulp is Buckeye HPF2 pulp and still another is IP SUPERSOFT® from International Paper Corporation. Suitable rayon fibers are 1.5 denier Merge 18453 fibers from Tencel Incorporated of Axis, Alabama, U.S.A.

- 25 Superabsorbent materials useful in forming the absorbent structure 101 may be chosen based on chemical structure as well as physical form. These include superabsorbent materials with low gel strength, high gel strength, surface cross-linked superabsorbent materials, uniformly cross-linked superabsorbent materials, or superabsorbent materials with varied cross-link density throughout the structure 101. The superabsorbent materials may be based on chemistries that include poly(acrylic acid), poly(iso-butylene-co-maleic anhydride), poly(ethylene oxide), carboxy-methyl cellulose, poly(-vinyl pyrrolidone), and poly(-vinyl alcohol). The

superabsorbent materials may range in swelling rate from slow to fast.

The superabsorbent materials of the absorbent structure 101 of the present invention are desirably particulate.

5 However, the superabsorbent materials may alternatively be in the form of foams, macroporous or microporous particles or fibers, particles or fibers with fibrous or particulate coatings or morphology. The superabsorbent materials may be in various length and diameter sizes and distributions and
10 may also be in various degrees of neutralization. Counter-ions are typically Li, Na, K, Ca.

An exemplary superabsorbent material is available from Stockhausen, Inc of Greensboro, North Carolina, U.S.A. and is designated FAVOR® SXM 880. Another exemplary superabsorbent
15 material may be obtained from the Dow Chemical Company of Midland, Michigan, U.S.A. under the name DRYTECH® 2035. A suitable fibrous superabsorbent material is available from Camelot Technologies, Ltd., of High River, Alberta, Canada and is designated FIBERDRI® 1241. Another suitable
20 superabsorbent material is available from Chemtall Inc. of Riceboro, GA, and is designated FLOSORB 60 LADY®, also known as LADYSORB 60®.

The binder fibers are desirably activatable, such as upon being heated, to form inter-fiber bonds within the
25 absorbent structure. As used herein, the inter-fiber bonds may be between the binder fibers and the absorbent fibers, between the binder fibers and the superabsorbent material, and/or among the binder fibers themselves.

In one embodiment, the binder fibers are bicomponent, or
30 multicomponent binder fibers. As used herein, multicomponent fibers refers to fibers formed from two (e.g., bicomponent) or more polymers extruded from separate extruders but joined together to form a single fiber. The polymers are arranged in substantially constantly positioned distinct zones across

a cross-section of the multi-component fibers and extend continuously along at least a portion of, and more desirably the entire, length of the fiber. The configuration of the multi-component fibers may be, for example, a sheath/core arrangement in which one polymer is surrounded by another, a side-by-side arrangement, a pie arrangement, an "islands-in-the-sea" arrangement or other suitable arrangement.

Bicomponent fibers are disclosed in U.S. Patent No. 5,108,820 to Kaneko et al., U.S. Patent No. 4,795,668 to Krueger et al., U.S. Patent No. 5,540,992 to Marcher et al. and U.S. Patent No. 5,336,552 to Strack et al. Bicomponent fibers are also taught in U.S. Patent No. 5,382,400 to Pike et al. and may be used to produce crimp in the fibers by using the differential rates of expansion and contraction of the two (or more) polymers.

Multicomponent binder fibers as used herein refers to multicomponent fibers in which at least one of the binder fiber components has a melt temperature that is less than at least one other binder fiber component. For example, the binder fiber may be a bicomponent fiber having a sheath/core arrangement in which the sheath component of the binder has a melt temperature that is lower than the melt temperature of the core component of the binder fiber. Upon heating of the binder fiber, the component having the lower melt temperature can fuse and bond to nearby absorbent fibers, superabsorbent material or other binder fibers while the other component, or components, remain in a generally unmelted state so as to generally maintain the integrity of the binder fiber.

In other embodiments, the binder fibers can be monofilament or homofilament fibers, biconstituent fibers and the like, as well as combinations thereof.

The binder fibers are desirably constructed of a material, or materials, that are readily heated upon exposure to an activation energy, and more particularly the binder

fibers are desirably susceptible to dielectric heating via exposure to electromagnetic energy wherein the binder fibers are melted to facilitate forming inter-fiber bonds within the absorbent structure.

- 5 Dielectric heating is the term applied to the generation of heat in non-conducting materials by their losses when subject to an alternating electric field of high frequency. For example, the frequency of the electric field desirably ranges from about 0.01 to about 300 GHz (billion cycles/sec).
- 10 Heating of non-conductors by this method is extremely rapid. This form of heating is applied by placing the non-conducting material between two electrodes, across which the high-frequency voltage is applied. This arrangement in effect constitutes an electric capacitor, with the load acting as the
- 15 dielectric. Although ideally a capacitor has no losses, practical losses do occur, and sufficient heat is generated at high frequencies to make this a practical form of heat source.

- The frequency used in dielectric heating is a function of the power desired and the size of the object being heated.
- 20 Practical values of voltages applied to the electrodes are 2000 to 5000 volts/in of thickness of the object. The source of power is by electronic oscillators that are capable of generating the very high frequencies desirable.

- The basic requirement for dielectric heating is the
- 25 establishment of a high-frequency alternating electric field within the material or object to be heated. Once the electric field has been established, the second requirement involves dielectric loss properties of the material to be heated. The dielectric loss of a given material occurs as a result of
- 30 electrical polarization effects in the material itself and may be through dipolar molecular rotation and ionic conduction. The higher the dielectric loss of a material, the more receptive to the high frequency energy it is.

In one embodiment, the electromagnetic energy is radio frequency or RF radiation, which occurs at about 27 MHz and heats by providing some portion of the total power delivered as ionic conduction to the molecules within the workpiece, with much of the remainder of the power delivered as dipolar molecular rotation.

In another embodiment, the electromagnetic energy is microwave radiation, which is dielectric heating at still higher frequencies. The predominate frequencies used in microwave heating are 915 and 2450 MHz. Microwave heating is 10 to 100 times higher in frequency than the usual dielectric heating, resulting in a lower voltage requirement if the loss factor is constant, though the loss factor is generally higher at microwave frequencies.

Microwave radiation can penetrate dielectric materials and be absorbed uniformly, thereby generating heat uniformly. Microwave energy is also selectively absorbed, offering a means for self-limiting the energy taken up by heterogeneous materials, making overheating less likely. These combined effects allow microwave heating to be more rapid, with less heating of surrounding materials, with a low thermal lag, and therefore with good control.

It is understood that the binder fibers or other suitable binding material may be activatable other than by dielectric heating, such as by convective or infrared heating or other non-thermal activation, as long as the binder fibers can be incorporated into the absorbent structure 101 prior to activation of the binder fibers to form inter-fiber bonds within the absorbent structure and then subsequently activated to form such inter-fiber bonds to thereby form the stabilized absorbent structure 101.

The binder fibers desirably have a fiber length which is at least about 0.061 mm. The binder fiber length can alternatively be at least about 3 mm and can optionally be at

least about 6 mm. In a further feature, the binder-fibers can have a length of up to about 30 mm or more. The binder fiber length can alternatively be up to about 25 mm, and can optionally be up to about 19 mm. In a further aspect, the
5 absorbent structure 101 may include binder fibers having lengths approximating one of the dimensions (e.g., length or width) of the absorbent structure. A relatively long binder fiber length provides an increased number of inter-fiber bond points upon activation of the fibers to help generate
10 improved integrity and permeability of the absorbent structure 101.

Synthetic fibers suitable for use as binder fibers in the absorbent structure 101 include those made from synthetic matrix polymers like polyolefins, polyamides,
15 polycaprolactones, polyetheramides, polyurethanes, polyesters, poly (meth) acrylates metal salts, polyether, poly(ethylene-vinyl acetate) random and block copolymers, polyethylene-b-polyethylene glycol block copolymers, polypropylene oxide-b-polyethylene oxide copolymers (and
20 blends thereof) and any other suitable synthetic fibers known to those skilled in the art.

In one embodiment, an energy receptive additive can be included in the binder fibers during production thereof wherein the additive allows the binder fibers to reach their
25 melting temperature much more rapidly than without the additive. This allows inter-fiber bonding in the absorbent structure 101 to occur at a faster rate than without the additive. The additive is desirably capable of absorbing energy at the frequency of electromagnetic energy (e.g.,
30 between 0.01 GHz and 300 GHz) rapidly, such as in the range of fractions of a second, desirably less than a quarter of a second and at most about half a second. However, it is contemplated that absorbent structures which involve the absorption of energy and bonding of the binder fibers with the

absorbent fibers over a period as long as about 30 seconds are intended to be within the scope of this invention. Melting of the binder fibers will depend on a number of factors such as generator power, additive receptivity, fiber denier, which is generally between 1 and 20, and the composition of the matrix polymer of the binder fiber.

The energy receptive additive may be added to a fiber-making matrix polymer as it is compounded, or coated onto the binder fiber after the fiber is produced. A typical method of compounding the additive with the matrix polymer is with a twin screw extruder, which thoroughly mixes the components prior to extruding them. Upon extrusion, the polymer blend is usually pelletized for convenient storage and transportation.

If the binder fiber is a bicomponent fiber, the energy receptive additive may be added to either or both of the fiber components. The energy receptive additive may also be added to one or more components, preferably the continuous phase, of a biconstituent fiber, and intermittently distributed throughout the length and cross-section of the fiber. If the additive to be used is not compatible with the matrix polymer into which it is to be blended, a "compatibilizer" may be added to enhance the blending. Such compatibilizers are known in the art and examples may be found in U.S. Patent Nos. 5,108,827 and 5,294,482 to Gessner.

The energy receptive additives can be receptive to various specific spectra of energy. Just as a black item will absorb more energy and become warmer than the same item colored white when subjected to the same amount of solar energy, energy receptive additives will absorb energy at their specific wavelength, directed at them.

A successful energy receptive additive should have a dielectric loss factor, as discussed previously, which is relatively high. The energy receptive additives useful in

this invention typically can have a dielectric loss factor measured in the RF or microwave frequency of between about 0.5 and 15, more particularly between about 1 and 15, and still more particularly between about 5 and 15. It should be noted
5 that the dielectric loss factor is a dimensionless number. It is preferred that the fiber have a dielectric loss tangent of between about 0.1 and about 1, and more particularly between about 0.3 and about 0.7.

The energy receptive additive may be, for example,
10 carbon black, magnetite, silicon carbide, calcium chloride, zircon, alumina, magnesium oxide, and titanium dioxide. The energy receptive additive may be present in an amount between 2 and 40 weight percent, and more particularly between 5 and 15 weight percent. The binder fibers may be crimped,
15 extendible and/or elastic.

Synthetic fibers incorporating such energy receptive additives are discussed at greater length in co-assigned U.S. Patent Application No. 10/034,079 filed December 20, 2001 and entitled Targeted Bonding Fibers for Stabilized Absorbent
20 Structures, the entire disclosure of which is incorporated herein by reference. Absorbent structures incorporating binder fibers having such energy receptive additives are discussed in co-assigned U.S. Patent Application No. 10/033,860 filed December 20, 2001 and entitled Targeted On-
25 Line Stabilized Absorbent Structures.

In addition to the binder fibers having an energy receptive additive, or as an alternative thereto, the binder fibers (or at least one binder fiber component thereof where the binder fiber is a multicomponent fiber)
30 may be constructed to have a relatively low melting temperature, such as less than about 200°C, more desirably less than about 150°C, even more desirably less than about 110°C, still more desirably less than about 90°C, and most desirably less than about 80°C. In such an instance, the

absorbent fibers and superabsorbent material of the absorbent structure 101 can act as a source of heat to indirectly transfer energy to melt the low melting temperature binder fibers. The absorbent fibers thus act
5 as an energy receptive material, and are excited to melt the adjacent low melting temperature polymers of the binder fibers for bonding to the absorbent fibers, to the superabsorbent material and/or to each other. This melting will depend on a number of factors such as
10 generator power, moisture content, specific heat, density of the absorbent structure 101 materials, fiber denier, which is generally between 1 and 20, and the composition and concentration of the low melting temperature polymers of the binder fibers.

15 The low melting temperature binder fibers desirably have a low specific heat to allow rapid heating and cooling of the absorbent structure 101. The low specific heat is useful during the heating cycle since the heat absorbed by the binder fiber before melting is relatively
20 low. The low specific heat is also useful during subsequent cooling of the absorbent structure 101, since the heat to be removed from the binder fiber material to cause it to solidify and stabilize the absorbent structure will be lower. A suitable specific heat range of the
25 binder fiber is in the range of about 0.1 to about 0.6 calories/gram.

The binder fibers also desirably have a high thermal conductivity to enable rapid transfer of heat therethrough. Thermal conductivity is proportional to
30 density and heat capacity/specific heat capacity of the binder fiber material. It is beneficial to achieve higher thermal conductivity using fibers with relatively high density. For example, the binder fibers desirably have a density of more than about 0.94 grams/cubic centimeter

(g/cc). This is helpful in accelerating the heating and cooling cycles during activation of the binder fibers to stabilize the absorbent structure 101. It is preferred that the thermal conductivity of the binder fibers be
5 greater than about $0.1 \text{ joules-sec}^{-1}\text{-mole}^{-1}\text{-degree Kelvin}^{-1}$.

Materials having a low melting enthalpy are also desirable for use as the binder fibers. The low melting enthalpy reduces the energy requirement for transformation of the binder fiber from a solid to a molten state during
10 heating thereof and from the molten state back to a solid state during subsequent cooling. As an example, the melting enthalpy of the binder fibers is desirably less than about 100 joules/gram, more particularly less than about 75 joules/gm and still more particularly less than
15 about 60 joules/gm.

The binder fibers also desirably have a low melt viscosity after activation, i.e., once the fiber is transformed from its solid to its generally molten state. This enables the binder fiber material to flow to the
20 junction points between the binder fibers and the absorbent fibers, superabsorbent material and/or other binder fibers for forming stable inter-fiber bonds. As an example, it is desired that the melt viscosity of the binder fibers be less than about 100,000 centipoise, more
25 particularly less than about 20,000 centipoise and most particularly less than about 10,000 centipoise.

The binder fibers also desirably have adequate surface energy to be wettable by fluid to be absorbed by the absorbent structure 101. This wettability is not
30 required in all applications, however, and may be accomplished using various surfactants known to those skilled in the art if the binder fiber is not intrinsically wettable.

Suitable binder fibers having a low melting temperature may be made from polyethylene-polyvinyl alcohol (PE-PVA) block or random copolymers, polyethylene-polyethylene oxide (PE-PEO) block/graft copolymers, polypropylene-polyethylene oxide (PP-PEO) block/graft copolymers, polyester, 5 polycaprolactone, polyamide, polyacrylates, polyurethane (ester or ether based). The melting point can be adjusted by adjusting the content of VA or PEO (for those polymers with VA and PEO) or the configuration. The binder fiber material 10 can be made by compounding with a twin extruder, Sigma mixer or other compounding equipment and then made into fibers by conventional non-woven processes like meltblowing and spunbonding.

As an example, absorbent structures incorporating such 15 low melting temperature binder fibers are discussed in co-assigned U.S. application Serial No. 10/034,021, filed December 20, 2002 and entitled Absorbent Structures Having Low Melting Fibers, the entire disclosure of which is incorporated herein by reference.

20 A number of other polymers and sensitizers may also, or may alternatively, be used with the energy receptive additives in making the binder fibers. Specifically selecting and/or positioning moieties along the polymer chain can affect the dielectric loss factor of the polymer 25 and enhance the responsiveness of the polymer to electromagnetic energy. These include polymer composites from blend, block, graft, random copolymers, ionic polymers and copolymers and metal salts. Desirably, the presence of one or more moieties along the polymer chain 30 causes one or more of the following: (1) an increase in the dipole moments of the polymer; and (2) an increase in the unbalanced charges of the polymer molecular structure. Suitable moieties include, but are not limited to,

aldehyde, ester, carboxylic acid, sulfonamide and thiocyanate groups.

The selected moieties may be covalently bonded or ionically attached to the polymer chain. As discussed
5 above, moieties containing functional groups having high dipole moments are desired along the polymer chain. Suitable moieties include, but are not limited to, urea, sulfone, amide, nitro, nitrile, isocyanate, alcohol, glycol and ketone groups. Other suitable moieties include
10 moieties containing ionic groups including, but are not limited to, sodium, zinc, and potassium ions.

For example, a nitro group may be attached to an aryl group within the polymer chain. It should be noted that the nitro group may be attached at the meta or para
15 position of the aryl group. Further, it should be noted that other groups may be attached at the meta or para position of the aryl group in place of the nitro group. Suitable groups include, but are not limited to, nitrile groups. In addition to these modifications, one could
20 incorporate other monomer units into the polymer to further enhance the responsiveness of the resulting polymer. For example, monomer units containing urea and/or amide groups may be incorporated into the polymer.

Suitable moieties include aldehyde, ester, carboxylic
25 acid, sulfonamide and thiocyanate groups. However, other groups having or enhancing unbalanced charges in a molecular structure can also be useful; or a moiety having an ionic or conductive group such as, e.g., sodium, zinc, and potassium ions. Other ionic or conductive groups may
30 also be used.

Specific combinations include low density PE/polyethylene-polyvinylacetate block copolymer, LDPE/polyethylene glycol, PE/ polyacrylates, polyethylene-vinyl acetate copolymer, polyester, polyurethane,

polyacrylates, polyethylene glycol (PEG), polyacrylamide (PAA), polyethylenimine (PEEM), polyvinyl acetate (PVAC), polyvinyl alcohol (PVA), polymethylacrylic acid- sodium salt (PMA-Na), polyacrylic acid sodium salt (PA-Na), and poly
5 (styrene sulfonate-co-methyl acrylic acid) sodium salt (P (SS-co-MA)-Na), and polymers of terephthalic acid, adipic acid and 1, 4 butanediol, and polybutylene succinate copolymers. Other materials include polymers of terephthalic acid, adipic acid and 1,4-butanediol, sold by BASF Corporation under the
10 name ECOFLEX® or by Eastman Chemical Co. under the name Eastar Bio™ copolyester. Blends and grafted copolymers of the above listed polymers are also suitable.

The absorbent structure 101 of the present invention is desirably of unitary construction. As used herein, the
15 unitary construction of the absorbent structure 101 means that the absorbent structure is a single non-woven web or layer comprising a mixture of absorbent fibers, binder fibers and, optionally, superabsorbent material. In the illustrated embodiment of Figs. 1-4, a single absorbent
20 structure 101 comprises substantially the entire absorbent body 53 of the diaper 21 (i.e., the dimensions of the absorbent structure substantially define the dimensions of the absorbent body). However, it is contemplated that the absorbent body 53 may comprise more than one layer,
25 wherein at least one of the layers is an absorbent structure 101 of the present invention, and remain within the scope of this invention as long as the absorbent structure is itself of unitary construction.

As an example, in one embodiment the absorbent
30 structure 101 is made by first forming or otherwise collecting the absorbent fibers, superabsorbent material and binder fibers into a unitary structure having a desired shape, contour and/or material distribution prior

to activation of the binder fibers (e.g., prior to inter-fiber bonding within the absorbent structure) to define a non-woven, generally pre-stabilized absorbent structure. The binder fibers are subsequently activated to form
5 inter-fiber bonds within absorbent structure to thereby stabilize the absorbent structure.

Optionally, a substantially hydrophilic tissue wrapsheet (not illustrated) may be employed to help maintain the integrity of the absorbent structure 101, or
10 the entire absorbent body 53. The tissue wrapsheet is typically placed about the absorbent structure or the absorbent body over at least the two major facing surfaces thereof and is composed of an absorbent cellulosic material, such as creped wadding or a high wet-strength
15 tissue. The tissue wrapsheet can also be configured to provide a wicking layer that helps to rapidly distribute liquid to the absorbent fibers within the absorbent body 53. The wrapsheet material on one side of the absorbent body may be bonded to the wrapsheet located on the
20 opposite side of the fibrous mass to effectively entrap the absorbent body.

In one embodiment, the material composition of the pre-stabilized absorbent structure 101 (e.g., prior to activation of the binder fibers) may be from about 0.1 to
25 about 60 weight percent binder fiber; from about 0 to about 80 weight percent superabsorbent material, and from about 5 to about 98 weight percent absorbent fibers. More particular embodiments may have from about 2 to about 10 weight percent binder fiber, from about 30 to about 70
30 weight percent superabsorbent material and from about 30 to about 70 weight percent absorbent fiber. In other embodiments, the pre-stabilized absorbent structure may have from about 0.1 to about 5 weight percent binder fiber.

In another embodiment, the pre-stabilized absorbent structure 101 can include an amount of binder fibers which is at least about 0.1 weight percent with respect to the total weight of the absorbent structure. The amount of binder fibers can alternatively be at least about 1 weight percent, and can optionally be at least about 3 weight percent. In other aspects, the amount of binder fibers can be up to a maximum of about 30 weight percent, or more. The amount of binder fibers can alternatively be up to about 20 weight percent, and can optionally be up to about 5 weight percent.

The absorbent fibers, binder fibers and superabsorbent material are desirably distributed within the absorbent structure generally across the full width of the absorbent structure, along the full length thereof and throughout the thickness thereof. However, the concentration of absorbent fibers, binder fibers and/or superabsorbent material within the absorbent structure 101 may be non-uniform i) across the width of the absorbent structure, ii) along the length of the absorbent structure, and/or iii) along the thickness or z-direction of the absorbent structure. For example, a heavier concentration of absorbent fibers, binder fibers and/or superabsorbent material may be disposed in different strata (e.g., in the z-direction) or in different regions (e.g., along the length or across the width) of the absorbent structure.

It is also contemplated that one or more strata or regions of the absorbent structure 101 may be devoid of binder fibers and/or superabsorbent material, as long as the absorbent structure is of unitary construction and includes binder fibers in at least a portion of the structure. It is further contemplated that binder fibers constructed of different materials may be disposed in

different strata or regions of the absorbent structure 101 without departing from the scope of this invention.

The average basis weight of the pre-stabilized absorbent structure 101 is desirably in the range of about 5 30 to about 2500 grams/square meter (gsm), more desirably within the range of about 50 to about 2000 gsm, and even more desirably within the range of about 100 to about 1500 gsm. The pre-stabilized absorbent structure 101 can also be formed to have a non-uniform basis weight across its 10 width or along its length, with one or more high basis weight regions, and one or more low basis weight regions. In at least one high basis weight region, at least a significant portion of the absorbent structure 101 can have a composite basis weight which is at least about 700 15 gsm. The high basis weight region can alternatively have a basis weight of at least about 750 gsm, and can optionally have a basis weight of at least about 800 gsm. In other aspects, the high basis weight region of the absorbent structure 101 can have a composite basis weight 20 of up to about 2500 gsm or more. The high basis weight region can alternatively have a basis weight of less than or equal to about 2000 gsm, and more particularly less than or equal to about 1500 gsm.

Additionally, in at least one low basis weight region, 25 the pre-stabilized absorbent structure 101 can have a composite basis weight of at least about 50 gsm. The low basis weight region can alternatively have a basis weight of at least about 100 gsm, and can optionally have a basis weight of at least about 150 gsm. In another alternative 30 configuration, the low basis weight region of the absorbent structure 101 can have a composite basis weight of up to about 700 gsm, or more. The low basis weight region can alternatively have a basis weight of up to about 600 gsm, and can optionally have a basis weight of up to about 500 gsm.

In another aspect of the present invention, the absorbent structure 101 formed prior to activation of the binder fibers may have a density which is at least a minimum of about 0.01 g/cc as determined at a restraining pressure of 1.38 KPa (0.2 psi). The density can alternatively be at least about 0.02 g/cc, and can optionally be at least about 0.03 g/cc. In other aspects, the density may be up to a maximum of about 0.12 g/cc, or more. The density can alternatively be up to about 0.11 g/cc, and can optionally be up to about 0.1 g/cc. In one embodiment, the density of the pre-stabilized absorbent structure is substantially uniform throughout the absorbent structure. In another embodiment, the density is non-uniform across the width of the absorbent structure and/or along the length of the absorbent structure.

As used throughout the present application, the term "non-uniform" as used in reference to a particular characteristic or feature of the absorbent structure, is intended to mean that the characteristic or feature is non-constant or otherwise varies within the absorbent structure in accordance with a pre-determined non-uniformity, e.g., an intended non-uniformity that is greater than non-uniformities resulting from normal processing and tolerance variations inherent in making absorbent structures. The non-uniformity may be present as either a gradual gradient or as a stepped gradient, such as where the concentration, basis weight and/or density changes abruptly from one strata or region to an adjacent strata or region within the absorbent structure, and may occur repeatedly within the absorbent structure or may be limited to a particular portion of the absorbent structure.

The pre-stabilized absorbent structure 101 may also be formed to have a thickness which is non-uniform along the length of the absorbent structure and/or across the width of the absorbent structure. The thickness is the distance

between the major faces the absorbent structure, as determined in a local z-direction of the absorbent structure directed perpendicular to the planes of the major faces thereof at the location at which the thickness is determined.

- 5 A variation in thickness may be present as a gradual or otherwise sloped change in thickness or as a stepped change in thickness whereby the thickness changes abruptly from one portion of the absorbent structure to an adjacent portion.

Accordingly, one or more portions of the absorbent
10 structure 101 can have a relatively lower thickness, and other portions of the absorbent structure can have a relatively higher thickness. For example, in the illustrated embodiment, a portion 103 (Figs. 2 and 4) of the absorbent structure 101 which forms the absorbent body 53 of the diaper
15 21 is substantially thicker than the rest of the absorbent structure and corresponds generally to the front region 25 of the diaper to provide a targeted area of increased absorption capacity. The thicker portion 103 of the absorbent structure 101 extends lengthwise less than the full length of the
20 absorbent structure and is spaced longitudinally inward of the longitudinal ends of the structure. As shown in Fig. 2 the thicker portion 103 is also centrally positioned between the side edges 105 of the absorbent structure and spaced laterally inward from the side edges thereof.

- 25 Additionally, or alternatively, the pre-stabilized absorbent structure 101 may be formed to have a non-uniform width along the length of the absorbent structure. The width is the distance between the side edges of the absorbent structure, as determined in a direction parallel to the Y-
30 axis of the absorbent structure. A variation in width may be present as a gradual or otherwise sloped change in width or as a stepped change in which the width changes abruptly from one portion of the absorbent structure to an adjacent portion. As an example, the absorbent structure 101 may have

any of a number of shapes, including rectangular, I-shaped, or T-shaped and is desirably narrower in the crotch region 27 than in the front or back regions 25, 29 of the diaper 21.

As illustrated in phantom in Fig. 1, the shape of the

5 absorbent body 53 is defined by the absorbent structure 101 and is generally T-shaped, with the laterally extending crossbar of the "T" generally corresponding to the front region 25 of the diaper 21 for improved performance, especially for male infants.

10 It is understood, however, that the pre-stabilized absorbent structure 101 may have a substantially uniform thickness and/or may have a substantially uniform width, i.e., the side edges 105 of the absorbent structure are substantially straight and in generally parallel relationship
15 with each other along the length of the absorbent structure.

The absorbent structure 101 is formed in accordance with a desired method for making such an absorbent structure whereby the absorbent fibers, superabsorbent material and binder fibers are collected on a forming surface while the
20 binder fibers are in a pre-activated condition. The absorbent structure 101 is thus formed as a unitary structure having a desired shape and contour (e.g., a desired length, width and/or thickness profile) before activation of the binder fibers occurs, i.e., before inter-fiber bonding occurs
25 within the absorbent structure. The distribution of fibers and superabsorbent material within the pre-stabilized absorbent structure 101 may also be controlled during formation thereof so that the concentration of materials, basis weight and/or density is substantially non-uniform
30 prior to activation of the binder fibers. The orientation of the absorbent fibers and binder fibers within the absorbent structure is desirably generally random following formation of the pre-stabilized absorbent structure, including at the

major faces, side edges and longitudinal ends of the absorbent structure.

The binder fibers are then activated to form inter-fiber bonds with the absorbent fibers, the superabsorbent material and/or other binder fibers to stabilize the absorbent structure 101. More particularly, in one embodiment the pre-stabilized absorbent structure 101 is exposed to high-frequency electromagnetic energy (e.g., microwave radiation, radio frequency radiation, etc.) to melt the binder fibers for inter-fiber bonding with the absorbent fibers, and then cooled to generally solidify the binder fibers to thereby secure the inter-fiber bonds between the binder fibers and the absorbent fibers.

The absorbent structure desirably remains unmolded during and after activation of the binder fibers. As used herein, the term unmolded during and after activation of the binder fibers means that the binder fibers are not subjected to an operation in which the shape and/or orientation thereof within the absorbent structure, and particularly at the major faces, side edges and longitudinal ends of the absorbent structure, is changed as a result of pressure being applied to the binder fibers while the binder fibers are heated to a generally molten or otherwise activated state. For example, in typical molding operations, the absorbent structure or at least one or both major faces of the absorbent structure is pressed against or within a mold during or after heating of the binder fibers, or the mold itself may be heated so as to heat the binder fibers. Such a molding process forces a reorientation of the absorbent structure fibers to a generally non-random orientation and, and may also re-shape or even emboss the major surfaces of the absorbent structure. Because the absorbent structure 101 remains unmolded during and after activation of the binder fibers, the orientation of fibers within the absorbent structure, including at the major

faces, side edges and longitudinal ends thereof, remains generally random during and after activation of the binder fibers to stabilize the absorbent structure.

Following stabilization of the absorbent structure 101, the structure may have substantially the same shape, contour, material distribution and other characteristics as the pre-stabilized absorbent structure. The stabilized absorbent structure 101 is desirably sufficiently strong to support a peak tensile load which is at least a minimum of about 100 grams per inch (g/inch) of cross-directional (Y-axis) width of the absorbent structure. The stabilized absorbent structure 101 strength can alternatively be at least about 200 g/inch, and can optionally be at least about 500 g/inch. In other aspects, the absorbent structure 101 strength can be up to a maximum of about 10,000 g/inch, or more. The strength can alternatively be up to about 5000 g/inch, and can optionally be up to about 2000 g/inch. In determining the strength of the stabilized absorbent structure 101, any previously formed, separately provided reinforcing component should be excluded from the determination. Such reinforcing components (not shown) may, for example, be provided by a scrim, a continuous filament fiber, a yarn, an elastic filament, a tissue, a woven fabric, a non-woven fabric, an elastic film, a polymer film, a reinforcing substrate, or the like, as well as combinations thereof.

The stabilized absorbent structure 101 can be configured to have a strength sufficient to support a peak tensile load which is significantly greater than the peak tensile load that can be supported by the absorbent structure prior to activation of the binder fibers. In a particular aspect, the absorbent structure 101 can be configured to have sufficient strength to support a peak tensile load which is at least about 100% greater than the peak tensile load that can be supported by the absorbent structure prior to activation of

the binder fibers. The stabilized structure 101 can alternatively be configured to support a peak tensile load which is at least about 200% greater. Optionally, the stabilized structure 101 can be configured to support a peak
5 tensile load which is at least about 300% greater. The percentage of increase in the supported peak-load can be determined by the formula:

$$100 * (F2 - F1) / F1;$$

where:

10 F1 = the peak tensile load that can be supported by the absorbent structure 101 prior to activation of the binder fibers; and

F2 = the peak tensile load that can be supported by the stabilized absorbent structure.

15 The peak load that can be supported by an absorbent structure 101 can be determined by employing TAPPI Test Method Number T 494 om-96 entitled "Tensile Properties of Paper and Paperboard" (using constant rate of elongation apparatus) dated 1996. The test sample has a width of 1 inch
20 (2.54 cm), and a length of 6 inch (15.24 cm). The jaws used were INSTRON part number 2712-001 (available from Sintech, Inc., a business having offices in Research Triangle Park, North Carolina, U.S.A.), and were arranged with an initial separation distance of 5 inch (12.7 cm). The cross-head speed
25 was 12.7 mm/min, and the testing employed a MTS Systems Corp. model RT/1 testing machine controlled by TESTWORKS version 4.0 software, which are available from MTS Systems Corp., a business having office in Eden Prairie, Minnesota, USA. Substantially equivalent equipment may optionally be
30 employed.

The fluid permeability of the absorbent structure 101 is also affected by the incorporation of binder fibers therein to stabilize the absorbent structure. The fluid permeability is defined by Darcy's Law and is measured for an absorbent

saturated with a particular amount of fluid. More particularly, the permeability as that term is used herein is determined by the following permeability test.

5

Permeability Test

A suitable permeability test apparatus is shown in Figs. 15 and 16. The test apparatus comprises a cylinder 1134 and piston, generally indicated at 1136. The piston 1136 comprises a cylindrical LEXAN shaft 1138 having a concentric cylindrical hole 1140 bored down the longitudinal axis of the shaft. Both ends of the shaft 1138 are machined to provide ends 1142, 1146. A weight, indicated as 1148, rests on one end 1142 and has a cylindrical hole 1148a bored through at least a portion of its center. A circular piston head 1150 is positioned on the other end 1146 and is provided with a concentric inner ring of seven holes 1160, each having a diameter of about 0.95 cm, and a concentric outer ring of fourteen holes 1154, also each having a diameter of about 0.95 cm. The holes 1154, 1160 are bored from the top to the bottom of the piston head 1150. The piston head 1150 also has a cylindrical hole 1162 bored in the center thereof to receive end 1146 of the shaft 1138. The bottom of the piston head 1150 may also be covered with a biaxially stretched stainless steel screen 1164 with square openings of about 149 microns. A representative material for this piston is part number 85385T972 from McMaster-Carr Supply, a company having offices in Chicago, Illinois, U.S.A.

Attached to the bottom end of the cylinder 1134 is a stainless steel cloth screen 1166 that is biaxially stretched to tautness prior to attachment. The screen 1166 has square openings of about 105 microns. A representative material for the screen is part number 85385T976 from McMaster-Carr Supply, a company having offices in Chicago, Illinois, U.S.A.

A sample of the composite indicated as 1168 is supported on screen 1166.

The cylinder 1134 is either bored from a transparent LEXAN rod or equivalent or cut from a LEXAN tubing or
5 equivalent and has an inner diameter of about 6.00 cm and a height of approximately 10 cm. The cylinder includes a set of drainage holes (not shown) or other suitable means for holding a fluid level in the cylinder at approximately 7.8 cm above the screen 1166. Piston head 1150 is machined from a
10 LEXAN rod or equivalent. It has a height of approximately 16 mm and a diameter sized such that it fits within the cylinder 1134 with minimum wall clearance but still slides freely. Hole 1162 in the center of the piston head 1150 is used to match and provide snug, fluid impervious attachment to shaft
15 end 1146. Shaft 1138 is machined from a LEXAN rod or equivalent and has an outer diameter of about 2.32 cm and an inner diameter of about 0.64 cm. End 1146 is approximately 2.54 cm long and approximately 1.52 cm in diameter, forming an annular shoulder to support the weight 1148. The annular
20 weight 1148 has an inner diameter of about 1.59 cm so that it slips onto end 1142 of the shaft 1138 and rests on the annular shoulder formed therein. The annular weight can be made from a stainless steel or form other materials with corrosion resistance to 0.9% isotonic saline solution. The
25 combined weight of the piston 1136 and weight 1148 equals approximately 596 g, which correspond to a pressure of about 20.7 dynes/cm²) on an area of 28.27 cm².

When solutions flow through the piston/cylinder apparatus, the cylinder 1134 generally rests on a 16 mesh
30 rigid stainless steel support screen (not shown). Alternatively, the piston/cylinder arrangement may rest on a support ring (not shown) which matches the walls of the cylinder but effectively does not restrict flow from the bottom of the cylinder.

The piston and weight are placed in an empty cylinder to obtain a measurement from the bottom of the weight to the top of the cylinder. This measurement is taken using a caliper readable to 0.01 mm. Alternatively, this measurement is
5 taken using a bulk gauge with 0.01 mm accuracy such as a Model IDF-1050E gauge available from Mitutoyo America Corporation, a company having offices in Aurora, Illinois, U.S.A. This measurement will later be used to calculate the height of the gel bed. It is important to measure each
10 cylinder empty and to keep track of which piston and weight used. The same piston and weight should be used for measurement when the absorbent structure sample is swollen.

The absorbent structure sample used for determining permeability is formed by swelling a circular sample (e.g., a
15 cutout) of approximately 60 mm diameter placed in the bottom of the permeability cup apparatus (the sample should be in contact with the screen) with 0.9% (w/v) aqueous NaCl for a time period of about 60 minutes. The saline would be placed in a tray. A coarse plastic or rubber mesh with uniform
20 square openings of approximately 2-15 mm is used to allow saline to reach the cups to swell the samples.

At the end of this period, the piston and weight are placed on the swollen sample in the cylinder and then the cylinder, piston, weight, and sample are removed intact from
25 the saline. The thickness of the swollen sample is determined by measuring from the bottom of the weight to the top of the cylinder with a micrometer. Alternatively, this measurement is taken using a bulk gauge with 0.01 mm accuracy such as a Model IDF-1050E gauge available from Mitutoyo
30 America Corporation, a company having offices in Aurora, Illinois, U.S.A., provided that the zero point is unchanged from the initial thickness test. The thickness value obtained from measuring the empty cylinder, piston, and weight is subtracted from the value of the thickness obtained

after swelling the absorbent structure. The resulting value is the height "H" of the swollen sample.

The absorbent structure permeability measurement is initiated by adding the NaCl solution to cylinder 1134 with swollen sample 1168, piston 1150, and weight 1148 inside. The 0.9% NaCl solution is added to achieve and maintain a fluid height of about 7.8 cm above the bottom of the swollen absorbent structure sample. The quantity of fluid passing through the swollen sample versus time is measured gravimetrically. Data points are collected every second for thirty seconds once the fluid level has been stabilized to and maintained at about 7.8 cm in height. The flow rate Q through the swollen sample 1168 is determined in units of gm/sec by a linear least-square fit of fluid passing through the sample 1168 (in grams) versus time (in seconds).

Permeability in square microns is obtained by the following equation:

$$K = [Q \cdot H \cdot \mu \cdot 10^8] / [A \cdot \rho \cdot P]$$

20

where K = Permeability (square microns), Q = flow rate (g/sec), H = height of swollen absorbent structure sample (cm), μ = liquid viscosity (poise), A, = cross-sectional area for liquid flow (cm²), ρ = liquid density (g/cm³), and P = hydrostatic pressure (dynes/cm²). The hydrostatic pressure is calculated from

$$P = \rho \cdot g \cdot h$$

where ρ = liquid density (g/cm³), g = gravitational acceleration, nominally 981 cm/sec², and h = fluid height, e.g., 7.8 cm for the permeability test apparatus described above.

- - - - -

In general, the higher the permeability of the absorbent structure when saturated, the more open the structure is. As a result, the absorbent structure can more easily take in additional fluid and is therefore less likely to leak.

5 Without binder material, the permeability of a non-woven absorbent structure is based solely on the characteristics of the absorbent fibers and superabsorbent material and therefore has a relatively low fluid permeability, such as less than 20 square microns. The integrity of the absorbent
10 structure 101, and more particularly the void volume thereof, is increased by stabilizing the structure with binder materials, and more particularly by multi-component binder fibers, to substantially increase the permeability of the absorbent structure. For example, following activation of
15 the binder fibers, the stabilized absorbent structure 101 desirably has a permeability throughout the absorbent structure as measured by the above permeability test of greater than 20 square microns, more desirably greater than about 40 square microns, and even more desirably greater than
20 about 60 square microns.

It is understood that the permeability may be non-uniform along at least one of the length and the width of the absorbent structure 101, as long as the local permeability of the absorbent structure is at least greater than 20 square
25 microns. Without being bound to theory, it is also believed that an over-concentration of binder fibers within the stabilized absorbent structure can negatively affect the permeability of the absorbent structure. To facilitate increased permeability of the absorbent structure, the binder
30 fiber concentration within the absorbent structure is desirably in the range of about 0.1 percent to about 10 percent, and more desirably in the range of about 0.1 percent to about 5 percent, to facilitate increased permeability of the absorbent structure.

By forming the absorbent structure 101 generally in its final form prior to activation of the binder fibers, e.g., with the desired length, width, thickness and/or basis weight profile, no additional shaping, e.g., cutting, of the structure is required. As a result, the side edges of the absorbent structure 101 remain uncut after activation of the binder fibers, even where the width of the absorbent structure is non-uniform. It is also contemplated that the longitudinal ends of the absorbent structure 101 may be uncut, such as where each absorbent structure is formed as a discrete structure instead of from a continuous web which is subsequently cut into discrete structures.

The side edges of prior art stabilized absorbent structures that must be cut to a desired width profile typically have a cross-sectional edge profile, or surface contour, which is generally concave as shown in Fig. 11. Without being bound to a particular theory, it is believed that the concave surface contour results from the fibrous material at the side edge of the absorbent structure being pinched during cutting of the side edges. In contrast, the uncut side edges of the stabilized absorbent structure 101 of the present invention desirably have a cross-sectional edge profile, or surface contour, which is other than concave, such as generally straight and more desirably convex. For example, Fig. 12 is a cross-sectional edge profile of one uncut side edge of the stabilized absorbent structure 101 in which the surface contour of the side edge is convex.

Figs 13 and 14 respectively illustrate the difference in fiber orientation between an uncut side edge of the absorbent structure 101 and a cut side edge of the prior art absorbent structure. As can be seen in Fig. 13, the orientation of the fibers at the uncut side edge of the absorbent structure 101 is substantially random over its entire surface contour. The orientation of fibers at the cut side edge of the prior art

stabilized absorbent structure is disrupted, particularly at the concave segment of the surface contour, and is therefore considered to be non-random along the entire surface contour.

5

Experiment 1 - Edge Brightness Test

An experiment was conducted to quantify the difference between the cross-sectional profile of the side edges of a conventional stabilized absorbent structure wherein the side edges have been cut, such as to form a
10 desired width profile, and the cross-sectional profile of the uncut side edges of a stabilized absorbent structure
101 formed in accordance with the present invention. A first set of five samples corresponded to a conventional stabilized absorbent structure in which the side edges
15 were cut. Each of the test samples had a basis weight of about 350 gsm and a thickness of about 0.25 inches (about 8 mm) approximately 0.5 inches (e.g., about 12 mm) in from the side edge of the absorbent structure. A second set of five samples corresponded to a stabilized absorbent
20 structure formed in accordance with the present invention, and more particularly in accordance with the absorbent structure 101 shown in Fig. 10, having a central region of increased thickness intermediate the side edges and longitudinal ends of the absorbent structure. These test
25 samples each had a basis weight of about 350 gsm and a thickness of about 0.25 inches (about 8 mm) approximately 0.5 inches (e.g., about 12 mm) in from the side edge of the absorbent structure.

Each test sample was placed on a piece of flat, black
30 construction paper measuring about 18x24 inches and illuminated with an 8-bulb octagonal incident ring light to provide incident omni-directional dark-field illumination. The sample and background construction paper were aligned vertically under a lens of a suitable

image analysis system, such as that available from Cambridge/Leica of Bannockburn, Illinois, U.S.A. under the tradename Quantimet 970 Image Analysis System, so that the sample filled about one half (the right half) of the monitor screen of the image system. Image formation was accomplished using a 50mm EL-Nikkor lens, f/2.8, with EL-to-F and F-to-C adapters, available from Nikon OEM Sales of Melville, New York. The working distance between the lens and the test sample was about 250 mm (about 10 inches). The total field size (e.g., length) for 900 pixels was about 57mm (about 2.25 inches).

An optical brightness profile at the side edge of the sample was determined using the software routine of Appendix 1. More particularly, sixty scanning frames were used to determine the brightness of light imaged by the analysis system, with each frame being about 0.59mm in width. The arrangement was such that some of the frames (e.g., about 25-30) imaged only the black construction paper outward of the side edge of the sample and the remaining frames imaged the side edge of the sample in a line extending inward of the sample generally normal to the side edge in the X-Y plane of the sample. The measured brightness was based on a 6-bit gray scale, wherein 0 gray units equals black and 64 gray units equals white. The white level was set at 0.75 volts so that the maximum brightness encountered as an average within a frame would be 90-96 percent of maximum gray scale.

A "transition" brightness, e.g., corresponding to the outermost extent of the side edge within the set of scanning frames was identified as the first non-zero brightness reading within the scanning frames. Starting with the frame identified as the transition brightness, the brightness reading from the next eleven frames (marching inward from the side edge) was plotted (e.g.,

using Excel[®] software available from Microsoft) against the logarithmic distance of each frame inward from and including the starting frame. The data was then curve-fit with a second order polynomial function to determine a
5 coefficient "a" of the X^2 term and a coefficient "b" of the X term of the function at a 95% confidence range using a conventional student's T statistical analysis based on N=11. The test was conducted at two side edge locations of each sample.

10 For the first set of samples corresponding to the conventional stabilized absorbent structure in which the side edges were cut, the coefficient "a" of the X^2 term of the second order polynomial function used to curve fit the brightness data was about -17.79 to about -28.81, with a
15 mean of about -23.30. In contrast, the coefficient "a" of the samples corresponding to the stabilized absorbent structure of the present invention having uncut side edges was in the range of about 6.37 to about 11.03 with a mean of about 8.70. The coefficient "b" of the X term of the
20 second order polynomial function used to curve fit the brightness data was in the range of about 45.90 to about 53.70 with a mean of about 49.80 for the first set of samples and in the range of about 21.71 to about 26.69 with a mean of about 24.20 for the second set of samples.

25

Accordingly, it is desired that the side edges of a stabilized absorbent structure 101 constructed in accordance with the present invention have an edge brightness profile defined by a second order polynomial
30 function, as determined by the edge brightness test described above, in which the coefficient "a" of the X^2 term of the function is in the range of about -15 to about 20 and the coefficient "b" of the X term of the function is in the range of about 10 to about 40.

In particular embodiments, such as shown in Fig. 10, where the thickness of the stabilized absorbent structure 101 is non-uniform across its width and/or along its length there is a defined thickness gradient intermediate the side edges and/or the longitudinal ends of the absorbent structure. Using conventional forming techniques, such an absorbent structure is formed of two discrete layers (not shown) including a base layer and an upper layer cut to a smaller width and/or length than the base layer and adhered to the base layer intermediate the side edges and/or ends of the base layer. By cutting the upper layer to the desired narrower width, the conventional absorbent structure has a relatively sharp thickness gradient across its width. However, by forming a stabilized absorbent structure 101 of unitary construction in accordance with the present invention, the thickness gradient across the width of the absorbent structure is substantially less than that of the conventional absorbent structure.

Experiment 2-Absorbent Structure Brightness Test

An experiment was conducted to characterize the thickness gradient of two different types of stabilized absorbent structures. The first absorbent structure was a conventional stabilized absorbent structure formed from two separate layers including a base layer and an upper layer cut to a smaller width and length than the base layer and adhered to the base layer intermediate the side edges and longitudinal ends thereof. Three test samples corresponding to this type of absorbent structure were used. The second absorbent structure was a stabilized absorbent structure formed in accordance with the present invention, and more particularly in accordance with the absorbent structure 101 shown in Fig. 10, having a central

region of increased thickness intermediate the side edges and longitudinal ends of the absorbent structure. Three such test samples were used.

Each test sample was placed on a piece of flat, black construction paper measuring about 18x24 inches and the boundary of the sample was traced onto the construction paper with a pencil. A central opening was then cut in construction paper by cutting approximately 0.25 inches inside the boundary line and removing the cut piece. The sample was then placed back on the construction paper (e.g., on the boundary line) and then the sample and construction paper were together placed on a conventional film viewer, such as a Pickers/Marconi film viewer available from Philips Medical Systems, N.A., of Bothell, Washington, U.S.A. Fluorescent light was transmitted by the viewer through the sample with the remaining light from the viewer blocked by the black construction paper.

Light transmitted through the sample was imaged by a suitable analysis system, such as that available from Cambridge/Leica of Bannockburn, Illinois, U.S.A. under the tradename Quantimet 970 Image Analysis System to determine the intensity of the light transmitted through the sample. The image formation was accomplished using a 20mm Nikon lens, f/4 with F-to-C adapter, such as is available from Nikon OEM Sales of Melville, N.Y., U.S.A. and with attached variable neutral density filter (e.g., "crossed polars") to control light intensity reaching the scanner. The working distance between the lens and the test sample was about 457mm (e.g., about eighteen inches). The total field size used, for 900 pixels, was about 253mm (almost ten inches) in width.

An optical brightness profile down the length of the sample (e.g., the portion of the sample not blocked by the black construction paper, including the region of

increased thickness) was determined using the software routine of Appendix 2. The tested samples were measured in a direction corresponding to the longitudinal axis of the corresponding absorbent structures from which the samples were obtained. However, the samples could also be tested in a direction corresponding to the cross-direction, or lateral axis of the absorbent structures. The brightness of light transmitted through the sample was determined at 60 frames down the sample length, with each frame being about 3mm in width. The measured brightness is based on a 6-bit gray scale, wherein 0 gray units equals black and 64 gray units equals white. The onset of a brightness gradient (e.g., corresponding to a change in thickness of the sample) down the length of the sample was determined by multiplying a frame measurement by 1.1 (e.g., a ten percent increase). If the adjacent frame measurement exceeds that value, then a gradient has begun.

The brightness gradient, as determined with a 95% confidence based on a conventional student's T statistical analysis, with N equal to either 4 or 3, down the length of each sample was averaged to determine the average gradient for each set of samples. For the first set of samples corresponding to the conventional stabilized absorbent structure in which a narrower upper layer is adhered to a base layer, the average brightness gradient was in the range of about 4.02 to about 6.84 gray units/mm, with a mean of about 5.43 gray units/mm. In contrast, the average brightness gradient of the samples corresponding to the stabilized absorbent structure of the present invention having a unitary construction was in the range of about 0.93 to about 2.31 gray units/mm, with a mean of about 1.62 gray units/mm.

- - - - -

Accordingly, it is desired that the average brightness gradient of a stabilized absorbent structure 101 constructed in accordance with the present invention to have a non-uniform thickness across its width is desirably in the range of about 0.5 to about 3.0 gray units/mm, and more desirably in the range of about 0.93 to about 2.31 gray units/mm, as determined by the absorbent structure brightness test. Where the thickness of the absorbent structure is non-uniform along the length of the absorbent structure, the average brightness gradient along the length of the absorbent structure intermediate the longitudinal ends thereof, as determined by the absorbent structure brightness test, is also in the range of about 0.5 to about 3.0 gray units/mm, and more desirably in the range of about 0.93 to about 2.31 gray units/mm.

Where the binder fibers are activated by subjecting the pre-stabilized absorbent structure 101 to dielectric heating (e.g., by exposure to electromagnetic energy), the stabilized absorbent structure also has unique physical characteristics associated with the presence of the binder fibers and subsequent activation by electromagnetic energy. These characteristics may be qualified and quantified using measurements of location and degree of oxidation and bonding efficiency within the absorbent structure. More particularly, techniques such as ultraviolet, visible, near infrared, infrared and Raman spectroscopy; surface analysis; differential scanning calorimetry; chromatographic separation; and various microscopic techniques can demonstrate the unique properties of materials heated "externally" via convection or infrared radiant heat transfer, versus "internally" using dielectric techniques.

With infrared and convection heating, radiant energy is translated into heat at the outer surface of the absorbent structure where the surface temperature rises

rapidly. Heat at the outer surface of the absorbent structure eventually diffuses via thermal conduction toward the center of the absorbent structure. This heating process is relatively slow and it takes a relatively significant time for the center of the absorbent structure to reach the threshold temperature necessary to melt binder fibers disposed toward the center of the structure. The slow process of thermal conduction is dependent upon the thermal conductivity of the structure and its overall dimensions (e.g., thickness). For such a heating process, a greater oxidation of fibers consequently occurs toward, and more particularly on, the outer surface of the structure. Thermal bonding in this manner also results in some yellowing of the fibers at the outer surface of the absorbent structure.

For dielectric heating (e.g., using electromagnetic energy), the peak temperature of the absorbent structure is also near the outer surface. However, the temperature rise at the center of the absorbent structure is nearly identical to that at the outer surface. This occurs since the dielectric heating process is active and direct. This direct transfer of energy to the center of the absorbent structure is less dependent upon thermal conductivity and more dependent upon the dielectric field strength and dielectric properties of the absorbent structure materials. In other words, the heating occurs generally from the center of the absorbent structure out toward the outer surface thereof.

Infrared energy must be applied from about 3 to 30 times longer than dielectric heating to achieve generally uniform heating throughout the absorbent structure. More particularly, such an extended heating time is required in order to attain a desired temperature threshold (e.g., the melting temperature of the binder fiber) at the center of

the absorbent structure. When properly applied, dielectric heating occurs rapidly and more uniformly. The rapid and uniform direct heating prevents large-scale thermal degradation of polymers within the heated absorbent structure.

The percent oxidation occurring for any given structure is proportional to the time exposure of the polymer to air at an elevated temperature (i.e., above 75°C). Infrared heating maintains a higher surface temperature throughout the heating cycle than microwave heating. The projected percent oxidation from infrared and convection heating will be from 5 to 35 (or more) times greater at the outer surface of an absorbent structure than it would be at the outer surface of an structure subjected to dielectric heating.

Heating an absorbent structure by microwave radiation will, therefore, produce a structure having less than 5 times more oxidation at its outer surface than at its center and more particularly less than 3 times more oxidation at its outer surface than at its center.

Large differences in oxidative degradation due to surface heating are easily measured using the analytical techniques previously described. For this application, typical compounds resulting from oxidative degradation include the existence of highly colored (high molar absorptivity) species. These colored compounds result from the formation of identifiable unsaturation. Examples include polyenes, unsaturated ketones, carboxyl-containing organic chains, quinones, and in general compounds with conjugated double bonds formed by the oxidation/degradation mechanisms of free radical formation, elimination reactions, and random chain scission. Often the increased oxidation can readily be observed with the unaided eye, making the materials heated using infrared and convection

heating appear more yellow and thus of perceived lower quality.

A rapid, non-destructive method to analyze polyolefins and cellulosic materials for the presence of compounds resulting from thermal degradation is hereafter described. The ultraviolet and visible spectrum is measured on a control and heated sample. The resulting spectra are subtracted and the difference spectra compared to a series of reference sample spectra prepared by heating a series of comparison samples at elevated temperatures for different known periods to bracket the heating application. The spectra yield direct information on the color and molecular absorptive properties of the thermal degradation products present in polymers and cellulose. The ratios of the absorbance maximum for the ultraviolet versus the visible spectrum yields precise information on the chemical species present and on the approximate concentrations. This basic procedure can be reproduced using ultraviolet and visible fluorescence, Raman spectroscopy, and infrared spectroscopy for similar and complementary results.

For more detailed structural analysis, the polymer and cellulosic materials can be dissolved in appropriate solvents, subjected to liquid chromatographic separation, and further analyzed using either the spectroscopic techniques described above or by mass spectrometry to determine the structure and molecular weight of any degradation compounds. These compounds are often highly colored as yellow or brown due to the browning effect of thermal degradation oxidation. There is a plethora of literature describing the detailed analysis of degradation compounds in synthetic and natural polymers and most of these techniques are quite sufficient for measuring the relative amount of oxidation throughout the cross-section of the heated structure. In addition, the use of scanning

electron microscopy with osmium tetroxide staining will reveal the integrity of bond points within the structure indicating the maximum heating temperature reached in any portion of the heated structure during the process.

5 Figs. 5-10 illustrate one embodiment of apparatus, generally indicated at 121, for making a stabilized absorbent structure 101 in accordance with the present invention and the above-described method. The apparatus 121 has an appointed lengthwise or machine-direction 123, an appointed
10 widthwise or cross-direction 125 which extends transverse to the machine direction, and an appointed thickness or z-direction 127. For the purposes of the present disclosure, the machine-direction 123 is the direction along which a particular component or material is transported lengthwise or
15 longitudinally along and through a particular, local position of the apparatus. The cross-direction 125 lies generally within the plane of the material being transported through the process, and is aligned perpendicular to the local machine-direction 123. The z-direction 127 is aligned
20 substantially perpendicular to both the machine-direction 123 and the cross-direction 125, and extends generally along a depth-wise, thickness dimension. In the illustrated embodiment, the machine direction 123 corresponds to the longitudinal X-axis of the diaper 21 of Fig. 1 and the cross-
25 direction 125 corresponds to the lateral Y-axis of the diaper.

The apparatus 121 comprises an airforming device, generally indicated at 131 in Figs. 5 and 6, having a movable, foraminous forming surface 135 extending about the
30 circumference of a drum 137 (the reference numerals designating their subjects generally). The drum 137 is mounted on a shaft 139 (Fig. 7) connected by bearings 141 to a support 143. As shown in Fig. 7, the drum includes a circular wall 145 connected to the shaft 139 for conjoint

rotation therewith. The shaft 139 is rotatably driven by a suitable motor or line shaft (not shown) in a counter-clockwise direction in the illustrated embodiment of Figs. 5 and 6. The circular wall 145 cantilevers the forming surface 135 and the opposite side of the drum 137 is open. A vacuum duct 147 located radially inward of the forming surface 135 extends over an arc of the drum interior. The vacuum duct 147 has an arcuate, elongate entrance opening 149 under the foraminous forming surface 135, as will be described in more detail hereinafter, for fluid communication between the vacuum duct and the forming surface. The vacuum duct 147 is mounted on and in fluid communication with a vacuum conduit 151 connected to a vacuum source 153 (represented diagrammatically in Fig. 7). The vacuum source 153 may be, for example, an exhaust fan.

The vacuum duct 147 is connected to the vacuum supply conduit 151 along an outer peripheral surface of the conduit and extends circumferentially of the conduit. The vacuum duct 147 projects radially out from the vacuum conduit 151 toward the forming surface 135 and includes laterally spaced side walls 147A and angularly spaced end walls 147B. The shaft 139 extends through the wall 145 and into the vacuum supply conduit 151 where it is received in a bearing 155 within the conduit. The bearing 155 is sealed with the vacuum supply conduit 151 so that air is not drawn in around the shaft 139 where it enters the conduit. The brace 157 and entire conduit 21 are supported by an overhead mount 159.

A drum rim 161 (Fig. 7) is mounted on the wall 145 of the drum 137 and has a multiplicity of holes over its surface area to provide a substantially free movement of fluid, such as air, through the thickness of the rim. The rim 161 is generally tubular in shape and extends around the axis of rotation of the shaft 139 near the periphery of the wall 145. The rim 161 is cantilevered away from the drum wall 145 and

has a radially inward-facing surface positioned closely adjacent to the entrance opening 149 of the vacuum duct 147. To provide an air resistant seal between the rim 161 and the entrance opening 149 of the vacuum duct 147, rim seals 163 are mounted on the inward-facing surface of the rim 161 for sliding, sealing engagement with the walls 147A of the vacuum duct. Seals (not shown) are also mounted on the end walls 147B of the vacuum duct 147 for sliding, sealing engagement with the inward-facing surface of the rim 161. The seals may be formed of a suitable material such as felt to permit the sliding, sealing engagements.

Referring back to Fig. 6, the apparatus 121 further comprises a forming chamber 171 through which the forming surface 135 is movable conjointly with the drum 137 upon rotation thereof. More particularly, in the illustrated embodiment the forming surface 135 moves in a counter-clockwise direction within the forming chamber 171 generally from an entrance 173 through which the forming surface enters the forming chamber substantially free of fibrous material, and an exit 175 through which the forming surface exits the forming chamber with the pre-stabilized absorbent structure 101 formed thereon. Alternatively, the drum 137 may rotate in a clockwise direction relative to the forming chamber 171. The forming chamber 171 is supported by a suitable support frame (not shown) which may be anchored and/or joined to other suitable structural components as necessary or desirable.

An absorbent fiber material, such as in the form of a batt 177 (Figs. 5 and 6) of absorbent fibers, is delivered from a suitable supply source (not shown) into a fiberizer 179, which may be a conventional rotary hammer mill, a conventional rotatable picker roll or other suitable fiberizing device. The fiberizer 179 separates the batt 177 into discrete, loose absorbent fibers which are directed from

the fiberizer into the interior of the forming chamber 171. In the illustrated embodiment, the fiberizer 179 is disposed above the forming chamber 171. However, it is to be understood that the fiberizer 179 may instead be located
5 remote from the forming chamber 171 and that absorbent fibers may be delivered to the interior of the forming chamber in other ways by other suitable devices and remain within the scope of the present invention.

Particles or fibers of superabsorbent material may be
10 introduced into the forming chamber 171 by employing conventional mechanisms such as pipes, channels, spreaders, nozzles and the like, as well as combinations thereof. In the illustrated embodiment, superabsorbent material is delivered into the forming chamber 171 via a delivery conduit
15 181 and nozzle system (not shown). A binder fiber material is delivered from a suitable binder fiber supply 183, such as in the form of bales (not shown), to a suitable opening device 185 to generally separate the binder fiber material into discrete, loose binder fibers. For example, the opening
20 device 185 may be suitable for picking, carding, planing or the like, as well as combinations thereof.

Selected quantities of binder fiber are then directed to a metering device 187, and the metering device feeds controlled quantities of the binder fiber into a binder fiber
25 delivery conduit 189. As an example, the binder fiber metering device 187 may be a model number CAM-1X12 device which is available from Fiber Controls, Inc., a business having offices located in Gastonia, North Carolina, U.S.A. A blower 191 or other suitable device may be employed to help
30 the flow of binder fibers through the delivery conduit 189.

In the illustrated embodiment, the binder fiber conduit 189 delivers the binder fibers into the fiberizer 171 for generally homogenous mixing with the absorbent fibers such that a homogenous mixture of absorbent and binder fibers is

subsequently delivered into the forming chamber 171.

However, it is understood that the binder fibers may instead be delivered into the interior of the forming chamber 171 separate from the absorbent fibers, and at a location other than at the delivery point at which the absorbent fibers are directed by the fiberizer 179 into the forming chamber.

Where the binder fibers are directed into the forming chamber 171 at a location which is closer to the entrance 173 of the forming chamber, the binder fibers will be more concentrated toward an inner or forming surface side 193 (Fig. 6) or major face of the absorbent structure 101 formed on the forming surface 135. Where the binder fibers are directed into the forming chamber 171 at a location which is closer to the exit 175 of the forming chamber, the binder fibers will be more concentrated toward an outer or free-surface side 195 (Fig. 6) or major face of the absorbent structure 101. As an alternative, the binder fibers may be combined with or otherwise incorporated into the source of the absorbent fibers instead of being separately delivered to the airforming device 131. For instance, the binder fibers may be blended with the absorbent fibers before the absorbent fibers are formed into a supply roll (e.g. the batt 177).

The foraminous forming surface 135 is defined in the illustrated embodiment by a series of mold elements, or form members 201 which are arranged end-to-end around the periphery of the forming drum 137 and independently attached to the drum. As may be seen in Fig. 8, the form members 201 each define a substantially identical pattern in which fibrous material is collected. The patterns correspond to a desired length, width and thickness of individual absorbent structures 101 which repeats over the circumference of the drum 137. However, partially repeating or non-repeating pattern shapes may be used with the present invention. It is also understood that a continuous, un-patterned absorbent

structure may be formed on the forming surface 135, such as where the forming surface is flat or where the formed absorbent structure is generally rectangular, and is subsequently processed (e.g., cut or otherwise formed) to a desired shape.

With general reference now to Figs. 8-10, the form members 201 comprise a foraminous member 205 which is operatively located on and secured to the forming drum 135. The foraminous member 205 may include a screen, a wire mesh, a hard-wire cloth, a perforated member or the like, as well as combinations thereof. In the particular embodiment shown in Fig. 10, the foraminous member 205 is fluted to define open channels 209 which extend generally radially to allow a substantially free flow of air or other selected gas from the outer surface of the drum 137 toward the interior of the drum. The channels 209 can have any desired cross-sectional shape, such as circular, oval, hexagonal, pentagonal, other polygonal shape or the like, as well as combinations thereof.

With particular reference to Fig. 10, the radially outermost surface defined by the foraminous member 205 can be configured with a non-uniform depth-wise (e.g., z-direction 127) surface contour to provide a desired non-uniform thickness of the pre-stabilized absorbent structure 101 formed on the forming surface 135. In desired arrangements, the z-direction 127 variation of the surface contour can have a selected pattern which may be regular or irregular in configuration. For example, the pattern of the surface contour can be configured to substantially provide a selected repeat-pattern along the circumferential dimension of the forming drum 137.

The surface contour of the foraminous member 205 shown in Fig. 10 thus defines longitudinally opposite end regions having a first average depth and a central region having a second average depth that is greater than the first average

depth. Each end region with the first average depth can provide a lower-basis-weight region and/or thickness of the absorbent structure 101 formed on the forming surface 135, and the central region with the greater second average depth can provide a relatively higher-basis-weight and/or thickness region of the absorbent structure. Desirably, each region with the first average depth can be substantially contiguous with an adjacent region with the greater second depth. It is also understood that the foraminous member 205 may be configured to have a z-direction 127 surface contour across the width of the forming surface 135 for providing a non-uniform basis weight and/or thickness across the width of the absorbent structure 101 formed on the forming surface.

In desired arrangements, the surface contour of the foraminous member 205 defines a generally trapezoidal shape. Alternatively, the contour may define a domed shape or may be flat. In the illustrated embodiment, the depth profile defined by the foraminous member 205 forms a pocket region 211 extending in the machine direction 123 along a portion of the length of the forming surface 135 and across a central portion of the width thereof for forming the absorbent structure shown in Fig. 4.

In a further aspect, one or more non-flow regions of the forming surface may be formed by employing a suitable blocking mechanism (not shown) which covers or otherwise occludes the flow of air through selected regions of the forming surface 135. As a result, the blocking mechanism can deflect or reduce the amount of fibers deposited on the areas of the forming surface 135 covered by the blocking mechanism. The blocking mechanism can optionally be configured to form other desired features of the absorbent structure 101, such as a series of key notches (not shown) on the formed absorbent structure. The key notches can, for example, provide a sensing point for locating and positioning a

subsequent severing of a web of longitudinally connected absorbent structures 101 formed on the forming surface 135 into discrete absorbent structures.

Still referring to Figs. 8-10, the form members 201 can also include one or more side-masking members 213, also sometimes referred to as contour rings, configured to provide a desired shape (e.g., width profile) to the absorbent structure 101. For example, in the illustrated embodiment the side-masking members 213 are provided by a pair of laterally opposed ring members which extend circumferentially around the forming drum 137 in laterally (cross-direction 125) opposed relationship with each other. Each of the members 213 has a non-uniform inner side wall 215 along its respective length so that the laterally opposed inner side walls of the side-masking members 213 define the width profile of the absorbent structure 101 formed on the forming surface 135. More particularly, the inner side walls 215 of the side-masking members 213 have a generally serpentine contour as they extend in the machine direction 123. As a result, the side-masking members 213 provide alternating narrower and wider regions of the form members 201. Accordingly, the absorbent structure 101 delivered from the airforming device 131 can have a width profile which is non-uniform along at least a portion of the length of the structure.

In another feature, at least one of the side-masking members 213 can include one or more key tabs (not shown). The individual key tabs may, for example, be employed for marking or otherwise identifying each intended absorbent structure 101 length along the circumference of the forming drum 137. Such side-masking members 213 can be particularly advantageous when the airforming device 131 is employed to produce absorbent structures for use in disposable, shaped absorbent articles, such as diapers, children's training

pants, feminine care products, adult incontinence products and the like.

It is understood that the inner side walls 215 of the side-masking members 213 can instead be generally straight (e.g. parallel to the machine direction 123) to produce a substantially rectangular, ribbon shaped absorbent structure 101. It is also understood that the side edges 105 of the absorbent structure 101 can alternatively be provided by cutting and removal, cutting and folding, or the like, as well as combinations thereof.

While the forming surface 135 is illustrated herein as being part of the forming drum 137, it is to be understood that other techniques for providing the forming surface 135 may also be employed without departing from the scope of the present invention. For example, the forming surface 135 may be provided by an endless forming belt (not shown). A forming belt of this type is shown in U.S. Patent No. 5,466,409, entitled FORMING BELT FOR THREE-DIMENSIONAL FORMING APPLICATIONS by M. Partridge et al. which issued on November 14, 1995.

In operation to make a formed, non-woven pre-stabilized absorbent structure, e.g., prior to activation of the binder fibers to form inter-fiber bonds within the absorbent structure, the vacuum source 153 (Fig. 7) creates a vacuum in the vacuum duct 147 relative to the interior of the forming chamber 171. As the forming surface 135 enters and then moves through the forming chamber 171 toward the exit 175 thereof, the absorbent fibers, binder fibers and superabsorbent material within the forming chamber are operatively carried or transported by an entraining air stream and drawn inward by the vacuum toward the foraminous forming surface. It is understood that the absorbent fibers, superabsorbent materials and binder fibers may be entrained in any suitable fluid medium within the forming chamber 171.

Accordingly, any reference herein to air as being the entraining medium should be understood to be a general reference which encompasses any other operative entraining fluid. Air passes inward through the forming surface 135 and is subsequently passed out of the drum 137 through the vacuum supply conduit 151. Absorbent fibers, binder fibers and superabsorbent materials are collected by the form members 201 to thereby form the pre-stabilized absorbent structure 101.

10 It is understood that the level or strength of the vacuum suction can be selectively regulated to control the density of the absorbent structure 101 formed on the forming surface 135. A relatively greater suction strength can be employed to produce a relatively higher density, or low
15 porosity, in the absorbent structure 101, and a relatively lower suction strength can be employed to produce a relatively lower density, or high porosity, in the absorbent structure. The specific level of suction strength will depend upon the specific flow characteristics present in the forming
20 chamber 171. It is readily apparent that a desired suction strength can be found by employing a short, iterative series of well known trial steps. The density of the absorbent structure 101 prior to activation of the binder fibers can be important for controlling the desired functional properties
25 of the subsequently stabilized absorbent structure.

Subsequently, the drum 137 carrying the absorbent structure 101 passes out of the forming chamber 171 through the exit 175 to a scarfing system, generally indicated at 271 in Figs. 5 and 6, where excess thickness of the absorbent
30 structure can be trimmed and removed to a predetermined extent. The scarfing system 271 includes a scarfing chamber 273 and a scarfing roll 275 positioned within the scarfing chamber. The scarfing roll 275 abrades excess fibrous material from the absorbent structure 101, and the removed

materials are transported away from the scarfing chamber 273 within a suitable discharge conduit as is well known in the art. The removed fibrous material may, for example, be recycled back into the forming chamber 171 or the fiberizer 179, as desired. Additionally, the scarfing roll 275 can rearrange and redistribute the fibrous material along the machine-direction 123 of the absorbent structure 101 and/or along the lateral or cross-machine direction 125 of the absorbent structure.

10 The rotatable scarfing roll 275 is operatively connected and joined to a suitable shaft member (not shown), and is driven by a suitable drive system (not shown). The drive system may include any conventional apparatus, such as a dedicated motor, or a coupling, gear or other transmission
15 mechanism operatively connected to the motor or drive mechanism used to rotate the forming drum 137. The scarfing system 271 can provide a conventional trimming mechanism for removing or redistributing any excess thickness of the absorbent structure 101 that has been formed on the forming
20 surface 135. The scarfing operation can yield an absorbent structure 101 having a selected contour on a major face-surface thereof (e.g., the free surface side 193 in the illustrated embodiment) that has been contacted by the scarfing roll 275. For example, the scarfing roll 275 may be
25 configured to provide a substantially flat surface along the scarfed surface of the absorbent structure 101, or may optionally be configured to provide a non-flat surface. The scarfing roll 275 is disposed in spaced adjacent relationship with the forming surface 135, and the forming surface is
30 translated past the scarfing roll upon rotation of the drum 137.

The scarfing roll 275 of the illustrated embodiment rotates in a clockwise direction which is counter to the direction of rotation of the drum 137. Alternatively, the

scarfing roll 275 may be rotated in the same direction as the forming surface 135 on the forming drum 137. In either situation, the rotational speed of the scarfing roll 275 should be suitably selected to provide an effective scarfing action against the contacted surface of the formed absorbent structure 101. In like manner, any other suitable trimming mechanism may be employed in place of the scarfing system 271 to provide a cutting or abrading action to the fibrous absorbent structure 101 by a relative movement between the absorbent structure and the selected trimming mechanism.

After the scarfing operation, the portion of the forming surface 135 on which the absorbent structure 101 is formed can be moved to a release zone of the apparatus 121 disposed exterior of the forming chamber 171. In the release zone, the absorbent structure 101 is drawn away from the forming surface 135 onto a conveyor, which is indicated generally at 281 in Figs. 5 and 6. The release can be assisted by the application of air pressure from the interior of the drum 137. The conveyor 281 receives the formed absorbent structure 101 from the forming drum 137 and conveys the absorbent structure to a collection area or to a location for further processing (not shown). Suitable conveyors can, for example, include conveyor belts, vacuum drums, transport rollers, electromagnetic suspension conveyors, fluid suspension conveyors or the like, as well as combinations thereof.

In the illustrated embodiment, the conveyor 281 includes an endless conveyor belt 283 disposed about rollers 285. A vacuum suction box 287 is located below the conveyor belt 283 to draw the absorbent structure 101 away from the forming surface 135. The belt 283 is perforate and the vacuum box 287 defines a plenum beneath the portion of the belt in close proximity to the forming surface so that the vacuum within the vacuum box acts on the absorbent structure 101 on the forming surface 135. Removal of the absorbent structure 101

from the forming surface 135 can alternatively be accomplished by the weight of the absorbent structure, by centrifugal force, by mechanical ejection, by positive air pressure or by some combination thereof or by another
5 suitable method without departing from the scope of this invention. As an example, in the illustrated embodiment, the absorbent structures 101 exiting the forming chamber are interconnected end-to-end to form a web or series of absorbent structures, each of which has a selected shape that
10 substantially matches the shape provided by the corresponding form members 201 used to form each individual absorbent structure.

Referring now to Fig. 5, after the pre-stabilized absorbent structures 101 are transferred from the forming
15 surface 135 to the conveyor 281, each absorbent structure is subsequently transported to an activation system 304 wherein the binder fibers are activated to form inter-fiber bonds within the absorbent structure. In one embodiment, the binder activation system 304 includes an activation chamber
20 306 through which each absorbent structure 101 passes, and a generator 308 for radiating electromagnetic energy within the activation chamber as each absorbent structure passes therethrough. For example, a suitable microwave generator 308 can produce an operative amount of microwave energy, and can
25 direct the energy through a suitable wave-guide 310 to the activation chamber 306.

In one embodiment, the electromagnetic energy may be radio frequency (RF) energy having an RF frequency which is at least a minimum of about 0.3 megahertz (MHz). The
30 frequency can alternatively be at least about 300 MHz, and can optionally be at least about 850 MHz. In other aspects, the frequency can be up to a maximum of about 300,000 MHz, or more. The frequency can alternatively be up to about 30,000 MHz, and can optionally be up to about 2,600 MHz. In a

particular embodiment, the radio frequency is desirably about 27 MHz. In another embodiment, the electromagnetic energy may be microwave energy in the range of about 915 MHz to about 2450 MHz.

5 In a particular arrangement, the electromagnetic energy can operatively heat the binder fibers to a temperature above the melting point of the binder fiber material. The melted binder fibers can then adhere or otherwise bond and operatively connect to the absorbent fibers, to the
10 superabsorbent material and/or to other binder fibers within the absorbent structure. The binder fibers may also be activated substantially without heating up the entire mass of the absorbent structure 101. In a particular feature, the binder fibers can be rapidly activated while substantially
15 avoiding any excessive burning of the absorbent structure 101.

 The heating and melt activation of the binder fibers can be produced by any operative mechanism available in the absorbent structure 101. For example, the electromagnetic
20 energy may heat water vapor present within the absorbent structure 101, and the heated vapor can operatively melt the binder fibers. In another mechanism, the electromagnetic energy can be absorbed by the binder fibers and the absorbed energy can operatively heat and melt the binder fibers.

25 The total residence time of the absorbent structure 101 within the activation chamber 306 can provide a distinctively efficient activation period. In a particular aspect, the activation period can be at least a minimum of about 0.002 sec. The activation period can alternatively be at least
30 about 0.005 sec, and can optionally be at least about 0.01 sec. In other aspects, the activation period can be up to a maximum of about 3 sec. The activation period can alternatively be up to about 2 sec, and can optionally be up to about 1.5 sec.

The activation chamber 304 can be a tuned chamber within which the electromagnetic energy can produce an operative standing wave. In a particular feature, the activation chamber 304 can be configured to be a resonant chamber.

5 Examples of suitable arrangements for the resonant, activation chamber system are described in a U.S. Patent No. 5,536,921 entitled SYSTEM FOR APPLYING MICROWAVE ENERGY IN SHEET-LIKE MATERIAL by Hedrick et al. which has an issue date of July 16, 1996; and in U.S. Patent No. 5,916,203 entitled
10 COMPOSITE MATERIAL WITH ELASTICIZED PORTIONS AND A METHOD OF MAKING THE SAME by Brandon et al which has a issue date of June 29, 1999. The entire disclosures of these documents are incorporated herein by reference in a manner that is consistent herewith. Another suitable activation system for
15 activating the binder fibers is disclosed in co-assigned U.S. Patent Application No. 10/037,385, filed December 20, 2001 and entitled Method and Apparatus for Making On-Line Stabilized Absorbent Materials.

The absorbent structure 101 exiting the activation
20 chamber 304 can also be selectively cooled or otherwise processed following heating of the binder fibers. The cooling of the absorbent structure 101 may be provided by a cooling system that includes: chilled air, a refrigerated atmosphere, radiant cooling, transvector cooling, ambient air
25 cooling, or the like, as well as combinations thereof. As representatively shown in Fig. 5, the cooling system may include a chilled-air supply hood 321, a vacuum conveyor 323, a blower 325 and a chiller or other refrigeration unit 327. The refrigeration unit 327 can provide a suitable coolant to
30 a heat exchanger 329, and the blower can circulate air through the heat exchanger for cooling. The cooled air can be directed into the supply hood 321 and onto the absorbent structure 101. The air can then be drawn out of the hood 321 for recirculation through the heat exchanger 329.

In a particular aspect, the absorbent structure 101 can be cooled to a setting temperature which is below the melting temperature of the binder fiber material. In another aspect, the absorbent structure 101 can be cooled to a temperature of not more than a maximum of 200°C within a selected setting distance downstream of the activation chamber 304. In a further feature, the absorbent structure 101 can be cooled to a temperature of not more than a maximum of 150°C within the selected setting distance. Accordingly, the setting distance can be measured after ending the exposure of the absorbent structure 101 to the high-frequency electromagnetic energy in the activation chamber 304. In a particular feature, the setting distance can be a minimum of about 0.5 m. The setting distance can alternatively be at least a minimum of about 0.75 m, and can optionally be at least about 1 m. In another feature, the setting distance can be a maximum of not more than about 30 m. The setting distance can alternatively be not more than about 20 m, and can optionally be not more than about 10 m.

In another aspect, an incremental portion of the heated absorbent structure 101 may be cooled to the desired setting temperature within a distinctive setting period, as determined from the time that the incremental portion of the activated structure exits the activation chamber 304. Accordingly, the setting period can be measured after ending the exposure of the absorbent structure to the high-frequency electromagnetic energy in the activation chamber 304. In a particular feature, the setting period can be a minimum of about 0.05 sec. The setting period can alternatively be at least a minimum of about 0.075 sec, and can optionally be at least about 0.1 sec. In another feature, the setting period can be a maximum of not more than about 3 sec. The setting period can alternatively be not more than about 2 sec, and can optionally be not more than about 1 sec.

The temperature of the absorbent structure 101 can be determined by employing an infrared scanner, such as a model No. LS601RC60 available from Land Infrared, a business having offices located in Bristol, Pennsylvania, U.S.A. With this
5 device, the temperature can be determined by aiming the measurement probe at the centerline of the structure 101, and setting up the probe (in accordance with the instruction manual) at a separation distance of 12 inches, as measured perpendicular to the structure. Alternatively, a
10 substantially equivalent device may be employed.

The stabilized absorbent structure 101 may also be compressed (e.g., by subjecting the structure to a debulking operation) to provide a desired thickness and density to the stabilized absorbent structure. In a desired aspect, the
15 debulking is conducted after the absorbent structure has been cooled. As representatively shown, the debulking operation can be provided by a pair of counter-rotating nip rollers 331. The debulking operation can alternatively be provided by a converging conveyor system, indexed platens, elliptical
20 rollers, or the like, as well as combinations thereof.

In a particular aspect, the thickness of the absorbent structure following debulking can be a minimum of about 0.5 mm. The debulked thickness can alternatively be at least about 1 mm, and can optionally be at least about 2 mm. In
25 another aspect, the debulked thickness can be up to a maximum of about 25 mm. The debulked thickness can alternatively be up to about 15 mm, and can optionally be up to about 10 mm.

In another aspect, the debulked stabilized absorbent structure 101 can have a density which is at least a minimum
30 of about 0.05 g/cm³. The debulked density can alternatively be at least about 0.08 g/cm³, and can optionally be at least about 0.1 g/cm³. In further aspects, the debulked density can be up to a maximum of about 0.5 g/cm³, or more. The

debulked density can alternatively be up to about 0.45 g/cm³, and can optionally be up to about 0.4 g/cm³.

In optional configurations, the stabilized absorbent structure 101 may be cut or otherwise divided to provide a
5 desired lateral shaping (e.g., width profile) of the structure, and/or to provide a laterally contoured structure. The cutting system may, for example, include a die cutter, a water cutter, rotary knives, reciprocating knives or the like, as well as combinations thereof. The shaping may be
10 conducted prior to and/or after the absorbent structure 101 is subjected to the activation of the binder fiber with the selected activation system 304.

It will be appreciated that details of the foregoing embodiments, given for purposes of illustration, are not to
15 be construed as limiting the scope of this invention. Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing
20 from the novel teachings and advantages of this invention. For example, features described in relation to one embodiment may be incorporated into any other embodiment of the invention.

Accordingly, all such modifications are intended to be
25 included within the scope of this invention, which is defined in the following claims and all equivalents thereto. Further, it is recognized that many embodiments may be conceived that do not achieve all of the advantages of some embodiments, particularly of the preferred embodiments, yet the absence of
30 a particular advantage shall not be construed to necessarily mean that such an embodiment is outside the scope of the present invention.

When introducing elements of the present invention or the preferred embodiment(s) thereof, the articles "a", "an",

"the" and "said" are intended to mean that there are one or more of the elements. The terms "comprising", "including" and "having" are intended to be inclusive and mean that there may be additional elements other than the listed elements.

- 5 As various changes could be made in the above constructions without departing from the scope of the invention, it is intended that all matter contained in the above description or shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

WHAT IS CLAIMED IS:

1. An absorbent article comprising:
 - a liner adapted for contiguous relationship with the wearer's body;
 - an outer cover in generally opposed relationship with
 - 5 the liner; and
 - an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure having a length, a thickness, a width and opposite side edges generally defining the width of the structure, the thickness
 - 10 of the absorbent structure being non-uniform along at least one of the length and the width of the absorbent structure, the opposite side edges of the absorbent structure being substantially uncut along the length of the absorbent structure, said absorbent structure being of unitary
 - 15 construction and comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure.
2. An absorbent article as set forth in claim 1 wherein the absorbent structure is airformed.
3. An absorbent article as set forth in claim 1 wherein the concentration of binder fibers in the absorbent structure is non-uniform along at least one of the length, the width and the thickness of the structure.
4. An absorbent article as set forth in claim 1 wherein the absorbent structure has a density, said density being non-uniform along at least one of the length, the width and the thickness of the absorbent structure.
5. An absorbent article as set forth in claim 1 wherein the binder fibers are multi-component fibers in which at least one binder fiber component has a melt temperature that

is lower than a melt temperature of at least one other binder fiber component.

6. An absorbent article as set forth in claim 1 wherein the width of the absorbent structure is non-uniform along the length of the non-woven structure.

7. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, the
10 binder fibers being multi-component fibers in which at least one binder fiber component has a melt temperature that is lower than a melt temperature of at least one other binder fiber component, the absorbent structure having a length, a thickness, a width and opposite side edges generally defining
15 the width of the structure, the width of the absorbent structure being non-uniform along the length of the absorbent structure, the opposite side edges of the absorbent structure being substantially uncut along the length of the absorbent structure.

8. An absorbent article as set forth in claim 7 wherein the non-woven structure is of unitary construction.

9. An absorbent article as set forth in claim 7 wherein the non-woven structure is airformed.

10. An absorbent article comprising:

a liner adapted for contiguous relationship with the

wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the
outer cover and comprising a non-woven absorbent structure
having a length, a thickness, and a width, the thickness of
the absorbent structure being non-uniform along at least one
10 of the length and the width of the absorbent structure, said
absorbent structure being of unitary construction and
comprising absorbent fibers and binder fibers activated to
form inter-fiber bonds within the absorbent structure, said
absorbent structure being unmolded during and after
15 activation of the binder fibers.

11. An absorbent article as set forth in claim 10
wherein the width of the absorbent structure is non-uniform
along the length of the non-woven structure.

12. An absorbent article comprising:

a liner adapted for contiguous relationship with the
wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the
outer cover and comprising a non-woven absorbent structure
having a length, a width, and a basis weight, the width of
the absorbent structure being non-uniform along the length of
10 the non-woven structure, the basis weight of the absorbent
structure being non-uniform along at least one of the length
and the width of the absorbent structure, said absorbent
structure being of unitary construction and comprising
absorbent fibers and binder fibers activated to form inter-
15 fiber bonds within the absorbent structure, the absorbent
structure having opposite major faces which are substantially
unmolded during and after activation of the binder fibers.

13. An absorbent article comprising:

a liner adapted for contiguous relationship with the
wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the
outer cover and comprising a non-woven absorbent structure
comprising absorbent fibers and binder fibers activated to
form inter-fiber bonds within the absorbent structure, the
10 binder fibers being multi-component fibers in which at least
one binder fiber component has a melt temperature that is
lower than a melt temperature of at least one other binder
fiber component, the absorbent structure having a length, a
thickness, a width and opposite side edges generally defining
15 the width of the structure, the width of the absorbent
structure being non-uniform along the length of the absorbent
structure, the side edges each having a surface contour no
portion of which is concave.

14. An absorbent article as set forth in claim 13
wherein each side edge of the non-woven structure has a
surface contour which is generally convex.

15. An absorbent article comprising:

a liner adapted for contiguous relationship with the
wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the
outer cover and comprising a non-woven absorbent structure
having a length, a thickness, a width, opposite side edges
generally defining the width of the structure, and opposite
10 major surfaces, the thickness of the absorbent structure
being non-uniform across the width of the structure along at

least a portion of the length of said structure, said absorbent structure having a brightness gradient across its width at said portion in the range of about 0.5 to about 3.0 gray units/mm as determined by an absorbent structure brightness test.

16. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with the liner; and

an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure having a length, a thickness, a width and opposite side edges generally defining the width of the structure, the width of the absorbent structure being non-uniform along the length of the absorbent structure, the side edges of the absorbent structure having an edge brightness profile defined by a second order polynomial function as determined by an edge brightness test, said function having a coefficient "a" of the X^2 term in the range of about -15 to about 20 and a coefficient "b" of the X term in the range of about 10 to about 40.

17. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with the liner; and

an absorbent body disposed between the liner and the outer cover, the absorbent body comprising a non-woven absorbent structure of unitary construction and comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, the absorbent structure having a length, a width, a thickness and a

permeability throughout the absorbent structure of greater than about 20 square microns, the thickness of the absorbent structure being non-uniform along at least one of the length
15 and the width of the absorbent structure..

18. An absorbent article as set forth in claim 17 wherein the binder fibers are multi-component fibers in which at least one binder fiber component has a melt temperature which is lower than a melt temperature of at least one other
5 binder fiber component.

19. An absorbent article as set forth in claim 17 wherein absorbent structure has a basis weight, said basis weight being non-uniform along at least one of the length and the width of the absorbent structure.

20. An absorbent article as set forth in claim 17 wherein the permeability of at least a portion of the absorbent structure is greater than or equal to about 40 square microns.

21. An absorbent article as set forth in claim 20 wherein the permeability of said portion of the absorbent structure is greater than or equal to about 60 square microns.

22. An absorbent article as set forth in claim 17 wherein the absorbent structure has a density which is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

23. An absorbent article as set forth in claim 17 wherein the concentration of binder fibers within the absorbent structure is non-uniform along at least one of the length, the width and the thickness of the absorbent
5 structure.

24. An absorbent article comprising:

a liner adapted for contiguous relationship with the
wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the
outer cover, the absorbent body comprising a non-woven
absorbent structure of unitary construction and comprising
absorbent fibers and binder fibers activated to form inter-
10 fiber bonds within the absorbent structure, the absorbent
structure having a length, a width, a thickness, a
permeability throughout the absorbent structure of greater
than about 20 square microns, and a density which is non-
uniform along at least one of the length, the width and the
15 thickness of the absorbent structure.

25. An absorbent article as set forth in claim 24
wherein the binder fibers are multi-component fibers in which
at least one binder fiber component has a melt temperature
which is lower than a melt temperature of at least one other
5 binder fiber component.

26. An absorbent article as set forth in claim 24
wherein absorbent structure has a basis weight, said basis
weight being non-uniform along at least one of the length and
the width of the absorbent structure.

27. An absorbent article as set forth in claim 24
wherein the permeability of at least a portion of the
absorbent structure is greater than or equal to about 40
square microns.

28. An absorbent article as set forth in claim 27
wherein the permeability of said portion of the absorbent

structure is greater than or equal to about 60 square microns.

29. An absorbent article as set forth in claim 24 wherein the concentration of binder fibers within the absorbent structure is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

30. An absorbent article comprising:
a liner adapted for contiguous relationship with the wearer's body;
an outer cover in generally opposed relationship with the liner; and
an absorbent body disposed between the liner and the outer cover, the absorbent body comprising a non-woven absorbent structure of unitary construction and comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, the absorbent structure having a length, a width, a thickness, a permeability throughout the absorbent structure of greater than about 20 square microns, the concentration of binder fibers within the absorbent structure being non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

31. An absorbent article as set forth in claim 30 wherein the binder fibers are multi-component fibers in which at least one binder fiber component has a melt temperature which is lower than a melt temperature of at least one other binder fiber component.

32. An absorbent article as set forth in claim 30 wherein absorbent structure has a basis weight, said basis

weight being non-uniform along at least one of the length and the width of the absorbent structure.

33. An absorbent article as set forth in claim 30 wherein the permeability of at least a portion of the absorbent structure is greater than or equal to about 40 square microns.

34. An absorbent article as set forth in claim 33 wherein the permeability of said portion of the absorbent structure is greater than or equal to about 60 square microns.

35. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the outer cover, the absorbent body comprising a non-woven absorbent structure having a unitary construction and comprising absorbent fibers and binder fibers activated to
10 form inter-fiber bonds within the absorbent structure, the absorbent structure having a length, a width and a thickness, the concentration of binder fibers within the absorbent structure being non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

36. An absorbent article as set forth in claim 35 wherein the absorbent structure is airformed.

37. An absorbent article as set forth in claim 35 wherein the thickness of the absorbent structure is non-uniform along at least one of the length and the width of the absorbent structure.

38. An absorbent article as set forth in claim 35 wherein the absorbent structure has a density which is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

39. An absorbent article as set forth in claim 35 wherein the binder fibers of the absorbent structure are activated by electromagnetic energy.

40. An absorbent article as set forth in claim 39 wherein the electromagnetic energy is microwave radiation.

41. An absorbent article as set forth in claim 35 wherein the absorbent body has a length, a width and a thickness substantially equal to the length, the width and the thickness of the absorbent structure.

42. An absorbent article as set forth in claim 37 wherein the absorbent structure has longitudinally opposite ends defining the length of the absorbent structure and laterally opposite side edges defining the width of the absorbent structure, a portion of said absorbent structure having a thickness greater than that of the remainder of the absorbent structure, said portion having a width which is less than the width of the absorbent structure at said portion.

43. An absorbent article as set forth in claim 42 wherein said portion is disposed laterally generally centrally between the side edges of the absorbent structure.

44. An absorbent article as set forth in claim 42 wherein said portion has a length less than the length of the absorbent structure and is disposed longitudinally inward of the ends of the absorbent structure.

45. An absorbent article as set forth in claim 35 wherein the absorbent structure comprises a mixture of absorbent fibers, binder fibers and superabsorbent material.

46. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure having a length, a width, a thickness and opposite major faces, the absorbent structure comprising absorbent fibers
10 and binder fibers, the binder fibers being multi-component fibers in which at least one binder fiber component has a melt temperature which is lower than a melt temperature of at least one other binder fiber component, the binder fibers having a substantially random orientation at said major
15 faces.

47. An absorbent article as set forth in claim 46 wherein the absorbent structure is of unitary construction.

48. An absorbent article as set forth in claim 47 wherein the absorbent structure is airformed.

49. An absorbent article as set forth in claim 46 wherein the concentration of binder fibers in the absorbent structure is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

50. An absorbent article as set forth in claim 46 wherein the binder fibers of the absorbent structure are activatable by electromagnetic energy.

51. An absorbent article as set forth in claim 46 wherein the major faces of the absorbent structure are substantially unmolded during and after activation of the binder fibers to form inter-fiber bonds within the absorbent structure.

52. An absorbent article as set forth in claim 46 wherein the concentration of binder fibers in the absorbent structure is greater than zero percent and less than about five percent.

53. An absorbent article as set forth in claim 46 wherein the thickness of the absorbent structure is non-uniform along at least one of the length and the width of the absorbent structure.

54. An absorbent article as set forth in claim 46 wherein the absorbent structure has a basis weight which is non-uniform along at least one of the length and the width of the absorbent structure.

55. An absorbent article as set forth in claim 46 wherein the absorbent structure has a density which is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

56. An absorbent article comprising:
a liner adapted for contiguous relationship with the wearer's body;
an outer cover in generally opposed relationship with the liner; and
an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure having a length, a width and a thickness, the absorbent structure comprising absorbent fibers and binder fibers

- 10 activatable to form inter-fiber bonds within the absorbent
structure, the binder fibers being multi-component fibers in
which at least one binder fiber component has a melt
temperature which is lower than a melt temperature of at
least one other binder fiber component, the width of the
15 absorbent structure being non-uniform along the length of
said absorbent structure prior to activation of the binder
fibers.

57. An absorbent article as set forth in claim 56
wherein the absorbent structure is of unitary construction.

58. An absorbent article as set forth in claim 57
wherein the absorbent structure is airformed.

59. An absorbent article as set forth in claim 56
wherein the concentration of binder fibers in the absorbent
structure is non-uniform along at least one of the length,
the width and the thickness of the structure.

60. An absorbent article as set forth in claim 56
wherein the concentration of binder fibers in the absorbent
structure is greater than zero percent and less than about
five percent.

61. An absorbent article as set forth in claim 56
wherein the thickness of the absorbent structure is non-
uniform along at least one of the length and the width of the
absorbent structure.

62. An absorbent article as set forth in claim 56
wherein the absorbent structure has a density which is non-
uniform along at least one of the length, the width and the
thickness of the absorbent structure.

63. An absorbent article as set forth in claim 56
wherein the absorbent body has a length, a width and a

thickness substantially equal to the length, the width and the thickness of the absorbent structure.

64. An absorbent article as set forth in claim 56 wherein the absorbent structure has a basis weight which is non-uniform along at least one of the length and the width of the absorbent structure.

65. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with the liner; and

an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure having a length, a width and a thickness, the absorbent structure comprising absorbent fibers, superabsorbent material and binder fibers activatable to form inter-fiber bonds within the absorbent structure, the superabsorbent material being distributed within the absorbent structure substantially across the full width of the absorbent structure, the width of the absorbent structure being non-uniform along the length of said absorbent structure prior to activation of the binder fibers.

66. An absorbent article as set forth in claim 65 wherein the absorbent fibers, superabsorbent material and binder fibers are homogeneously mixed throughout the absorbent structure.

67. An absorbent article comprising:

a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with the liner; and

an absorbent body disposed between the liner and the outer cover and comprising a non-woven absorbent structure having a length, a width, a thickness and opposite major faces, the absorbent structure comprising absorbent fibers and binder fibers activated to form inter-fiber bonds within the absorbent structure, the thickness of the absorbent structure being non-uniform along at least one of the length and the width of the absorbent structure, the binder fibers having a substantially random orientation at said major faces.

68. An absorbent article as set forth in claim 67 wherein the absorbent structure is of unitary construction.

69. An absorbent article as set forth in claim 68 wherein the absorbent structure is airformed.

70. An absorbent article as set forth in claim 67 wherein the concentration of binder fibers in the absorbent structure is non-uniform along at least a portion of at least one of the length, the width and the thickness of the absorbent structure.

71. An absorbent article as set forth in claim 67 wherein the binder fibers of the absorbent structure are thermally activated by electromagnetic energy.

72. An absorbent article as set forth in claim 67 wherein the major faces of the absorbent structure are substantially unmolded during and after activation of the binder fibers.

73. An absorbent article as set forth in claim 67 wherein the absorbent structure has a basis weight which is non-uniform along at least one of the length and the width of the absorbent structure.

74. An absorbent article as set forth in claim 67 wherein the absorbent structure has a density which is non-uniform along at least one of the length, the width and the thickness of the absorbent structure.

75. An absorbent article comprising:


a liner adapted for contiguous relationship with the wearer's body;

an outer cover in generally opposed relationship with
5 the liner; and

an absorbent body disposed between the liner and the outer cover, the absorbent body comprising a non-woven absorbent structure of unitary construction and comprising absorbent fibers and binder fibers activated to form inter-
10 fiber bonds within the absorbent structure; the absorbent structure having a length, a width and a thickness, the binder fibers comprising greater than zero percent and less than about five percent of the weight of the absorbent structure.

76. An absorbent article as set forth in claim 75 wherein the binder fibers are multi-component fibers in which at least one binder fiber component has a melt temperature which is lower than a melt temperature of at least one other
5 binder fiber component.

FIG. 1

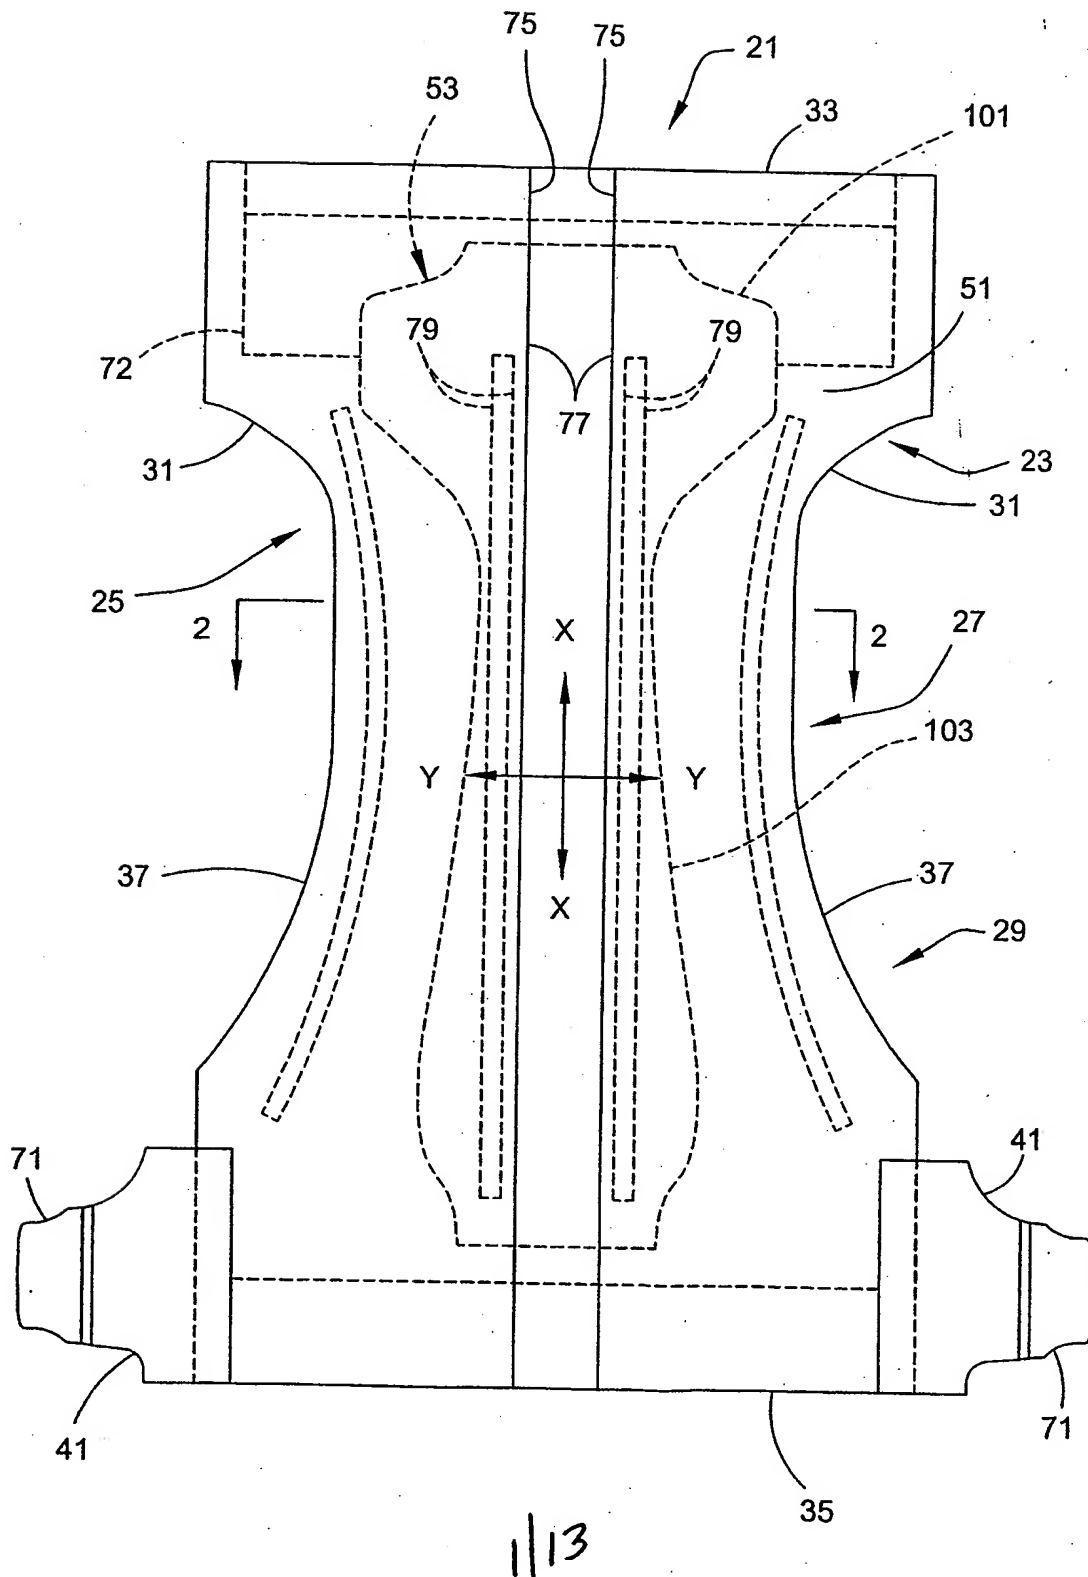

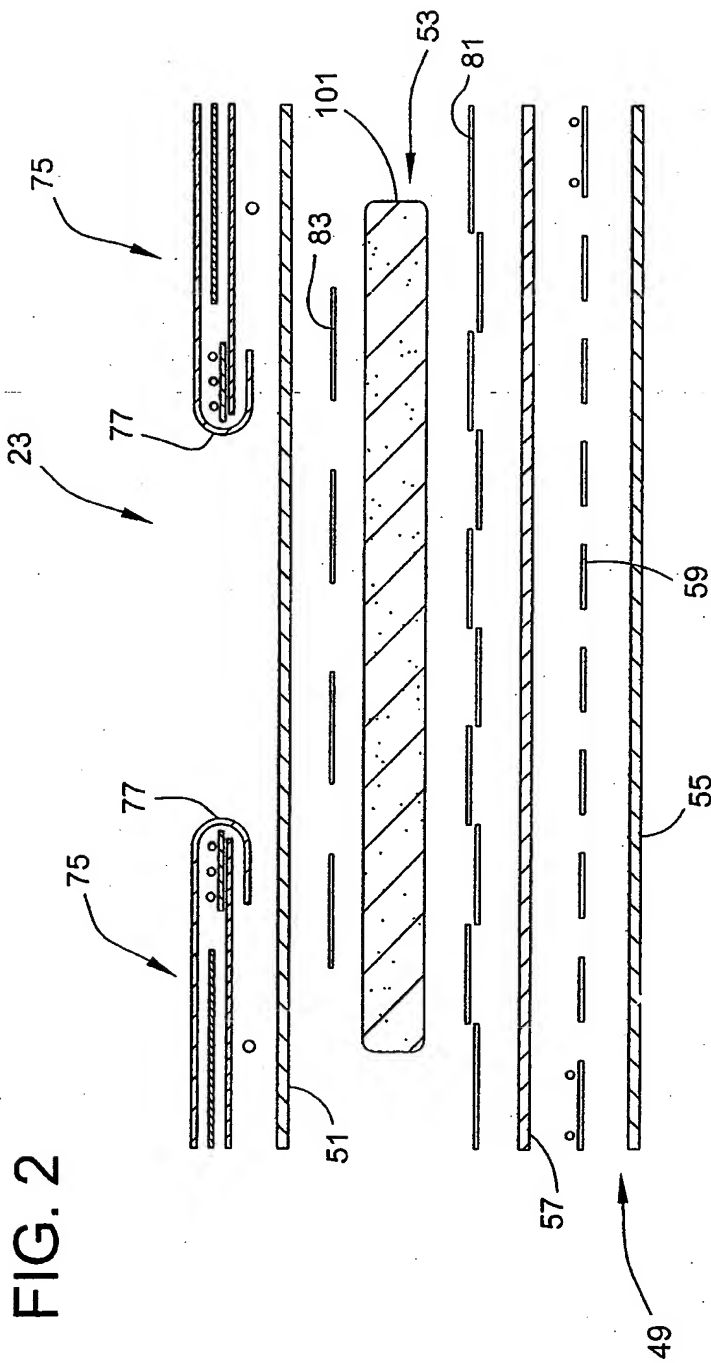


FIG. 3

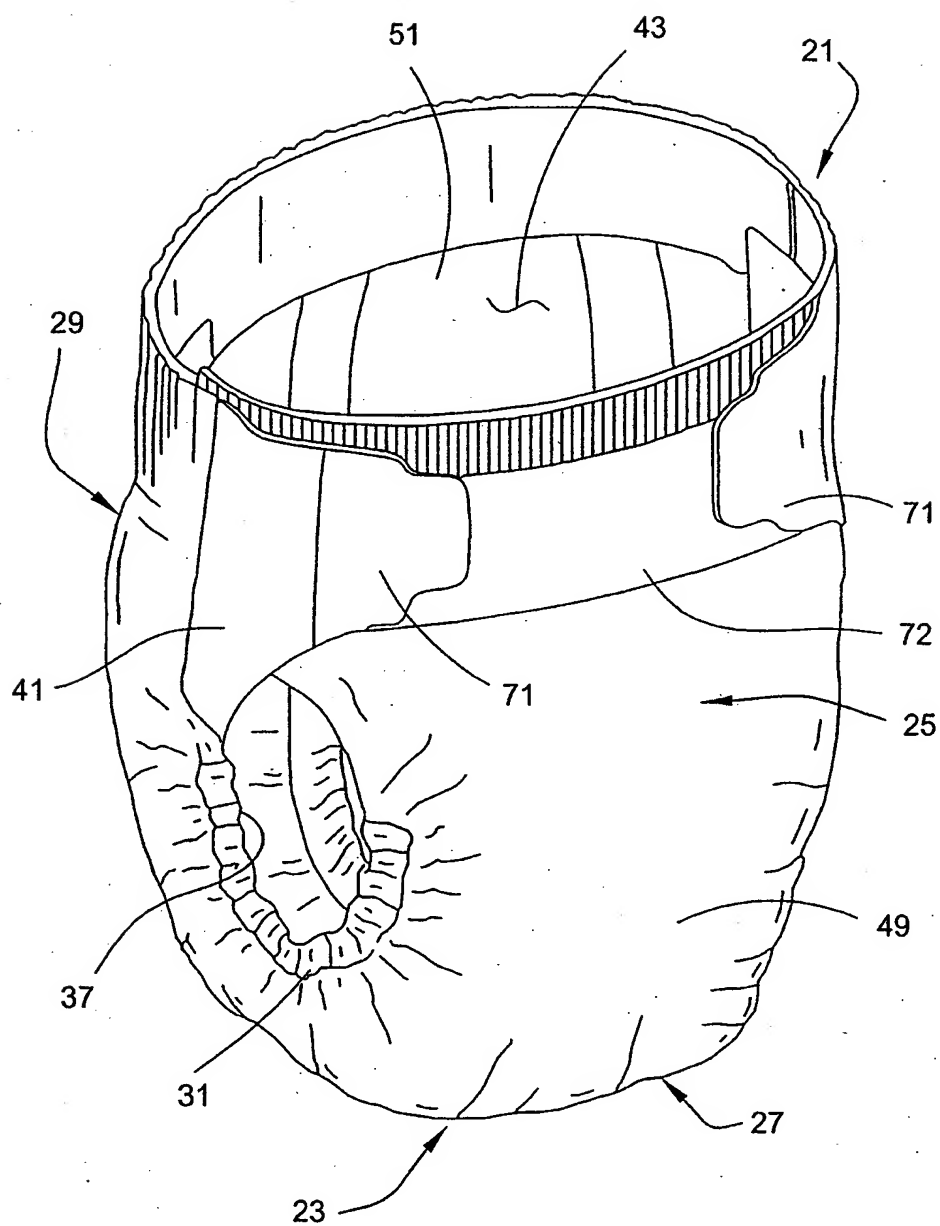


FIG. 4

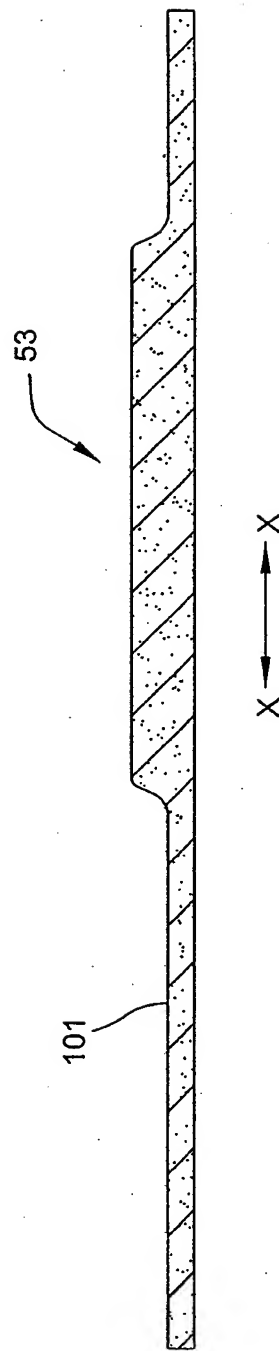


FIG. 5

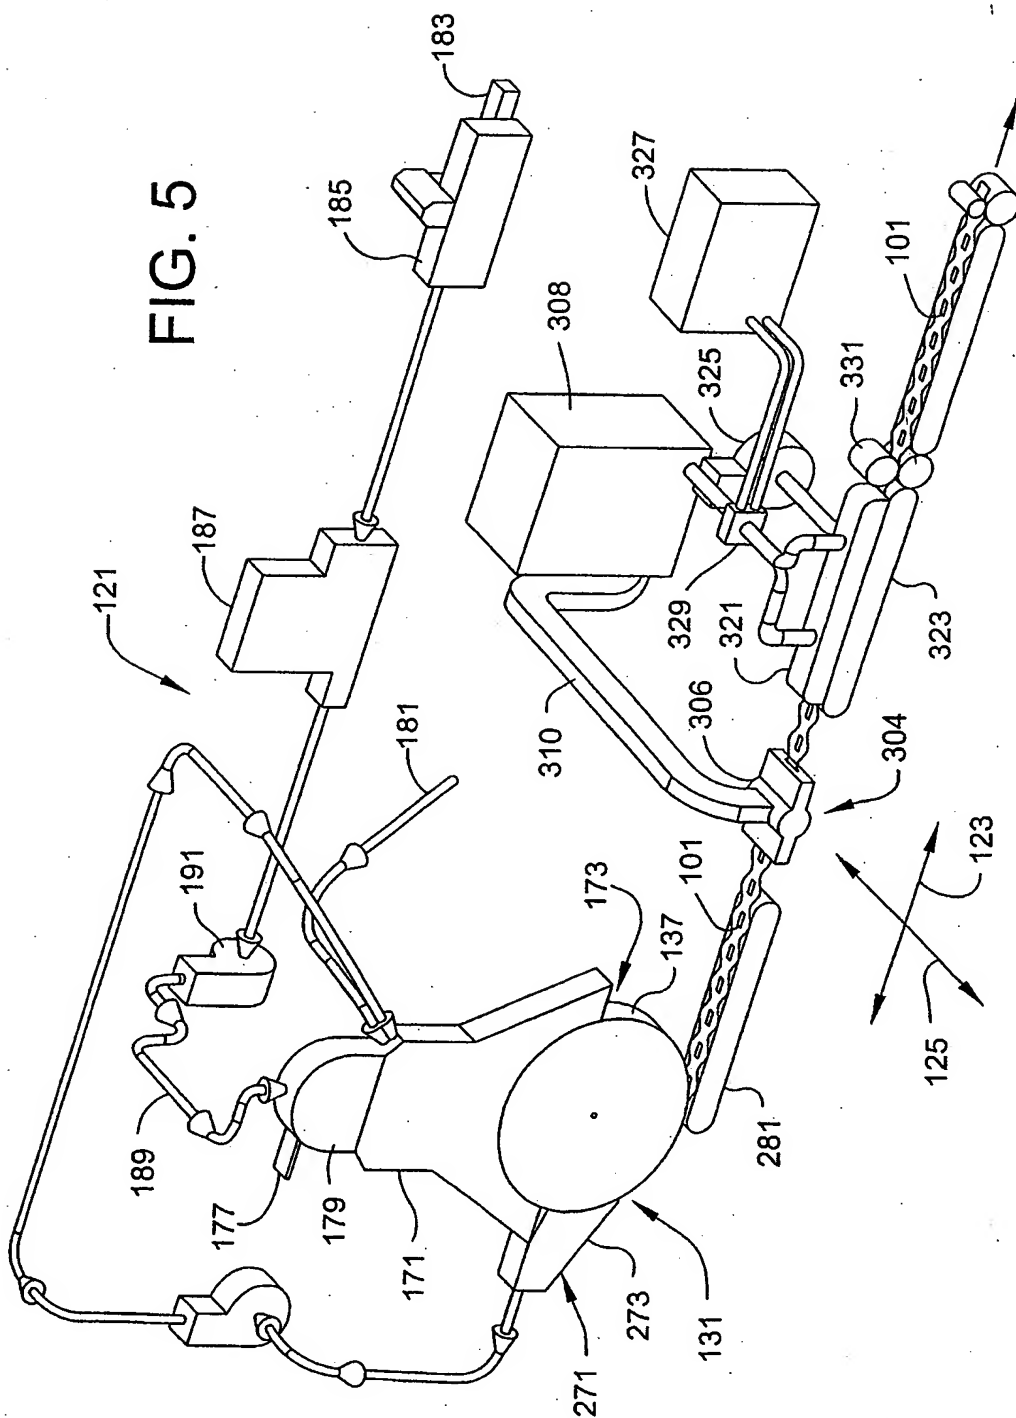
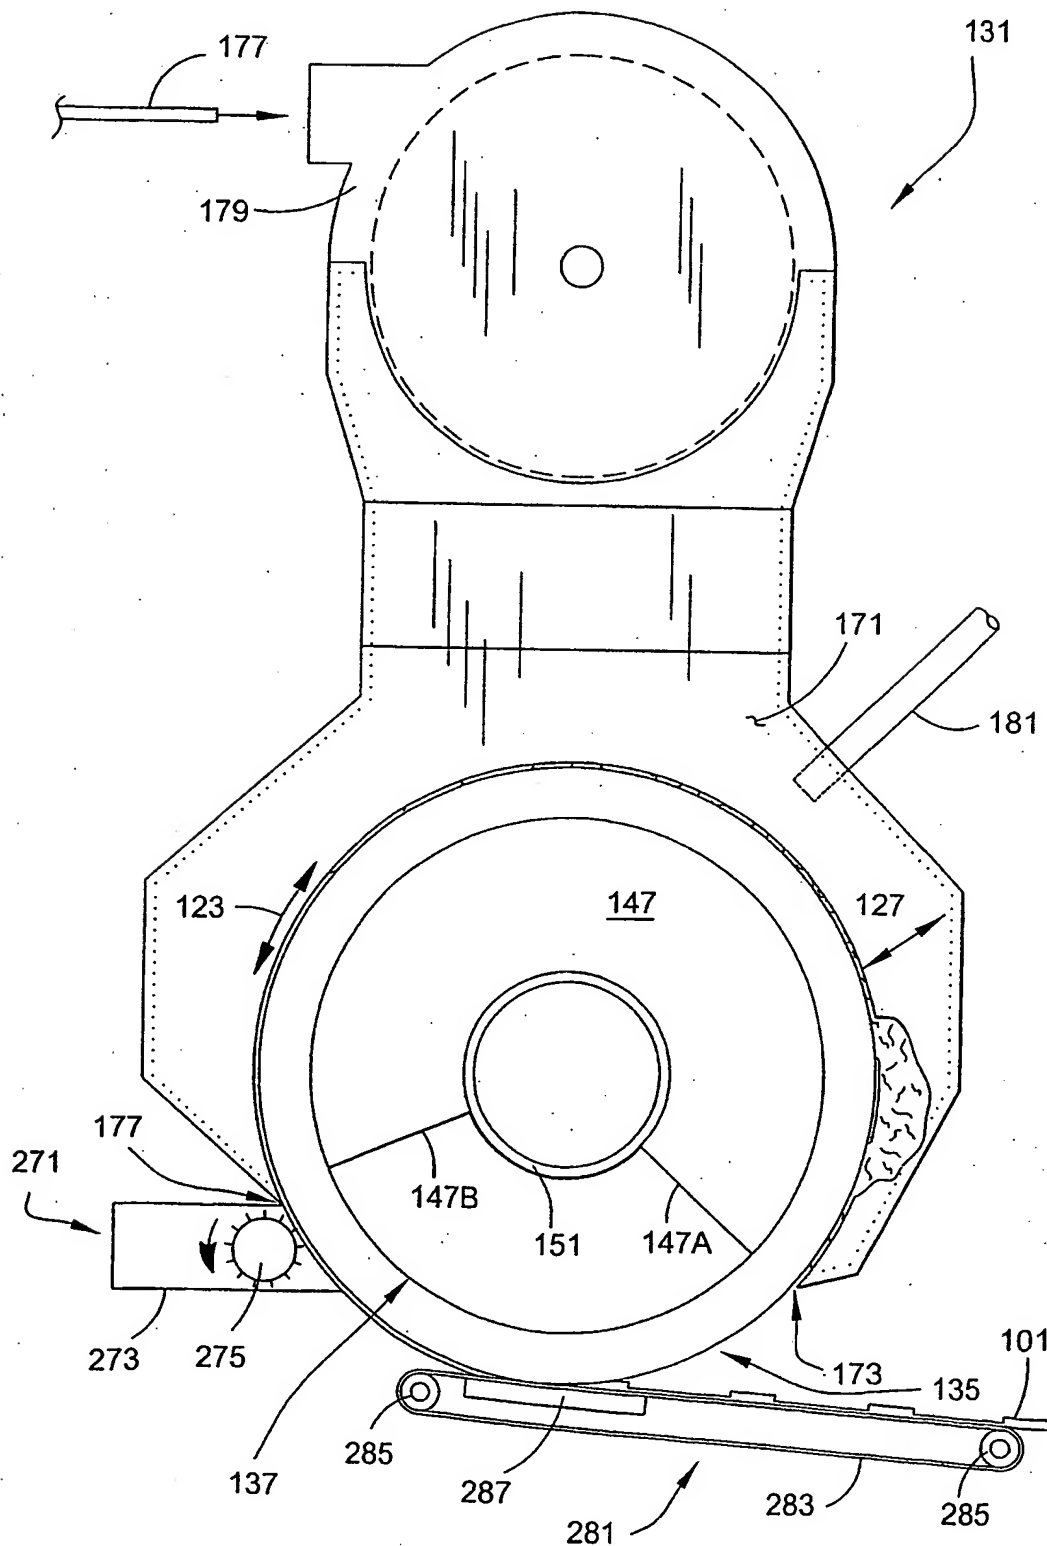


FIG. 6



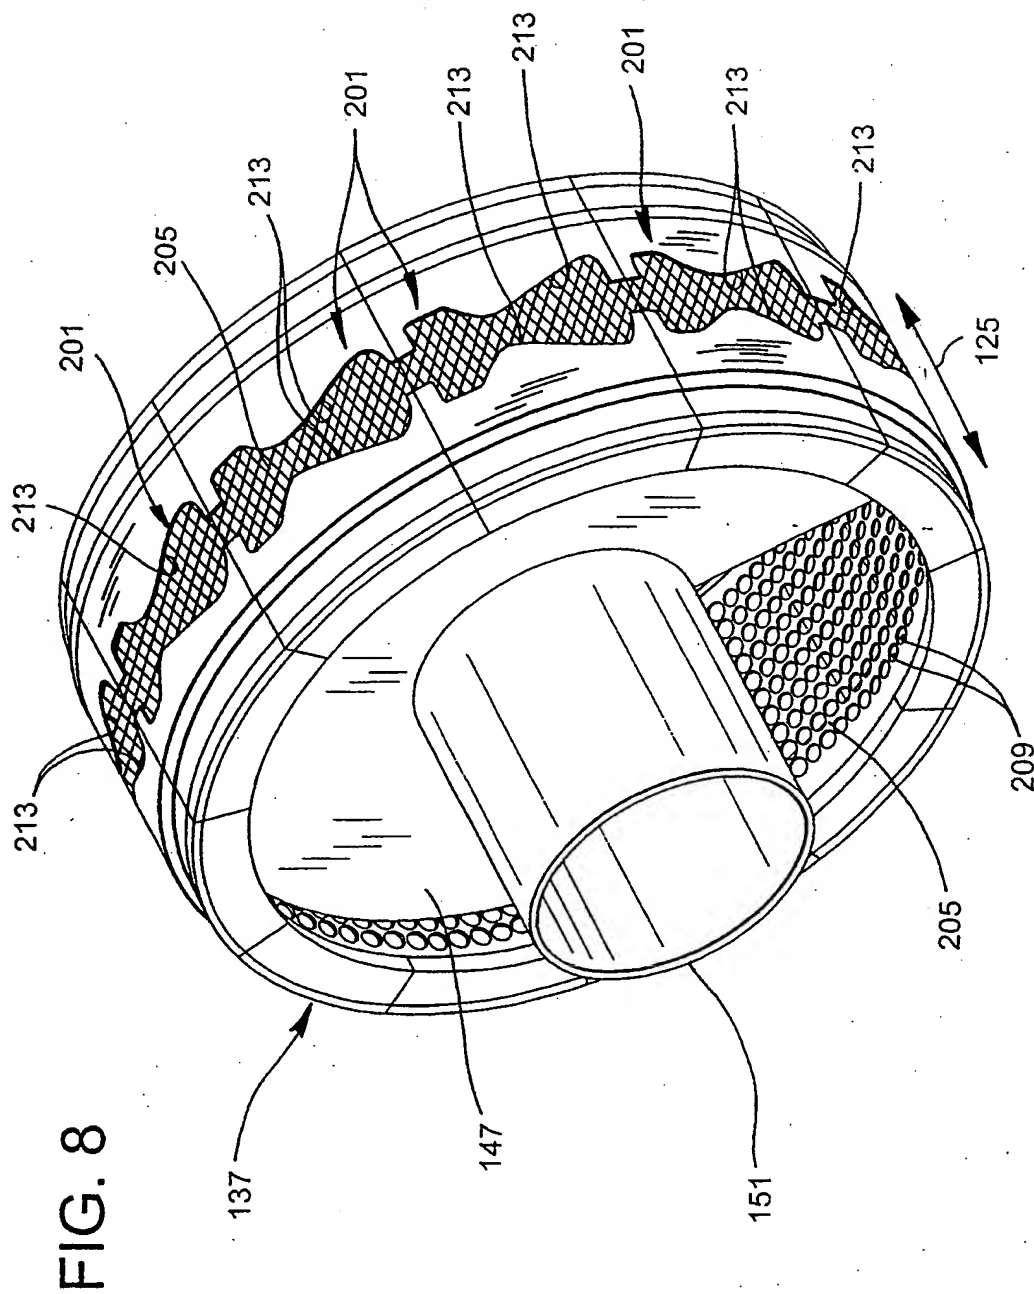


FIG. 9

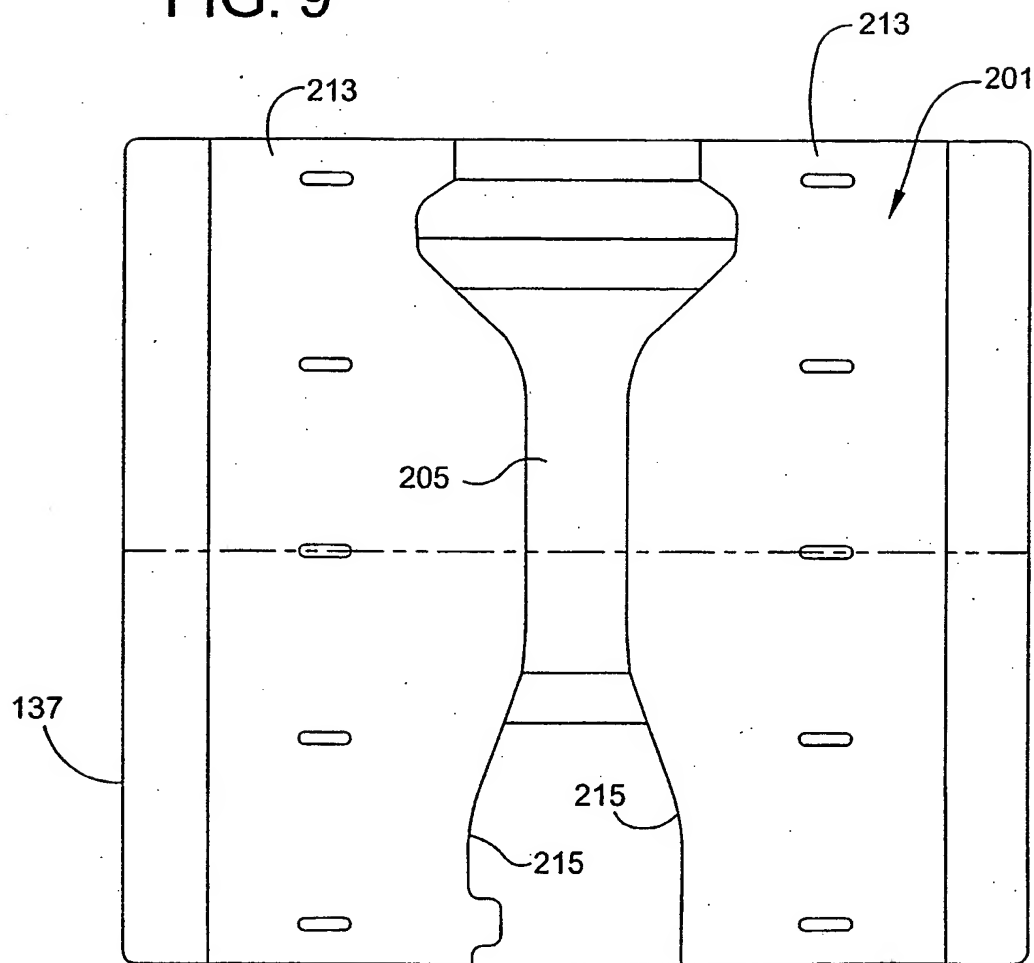


FIG. 10

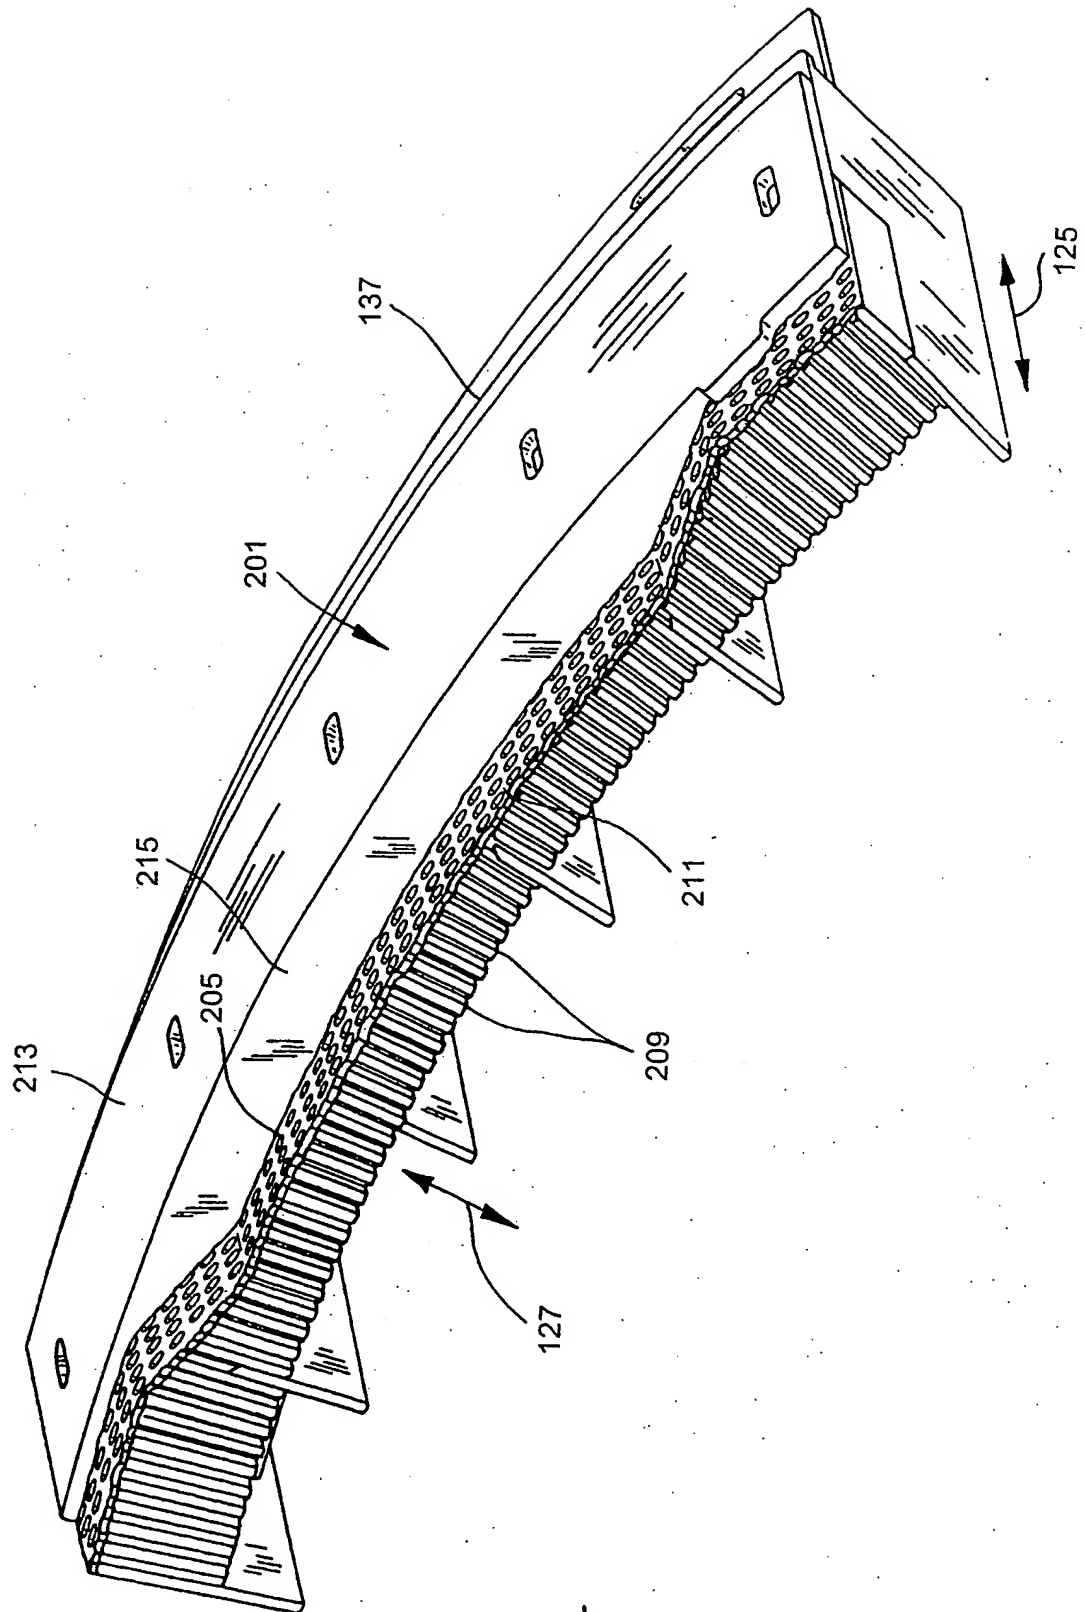


FIG. 11
PRIOR ART

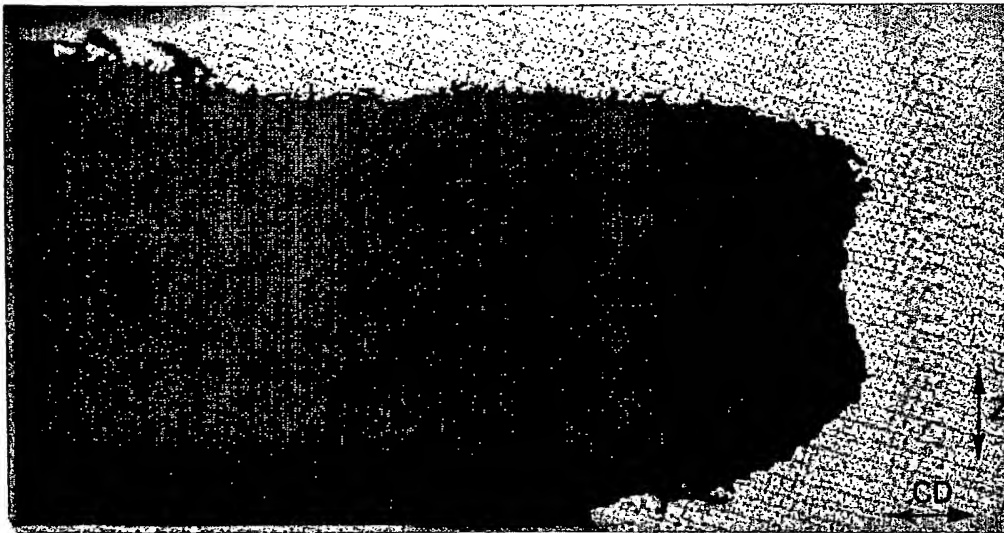
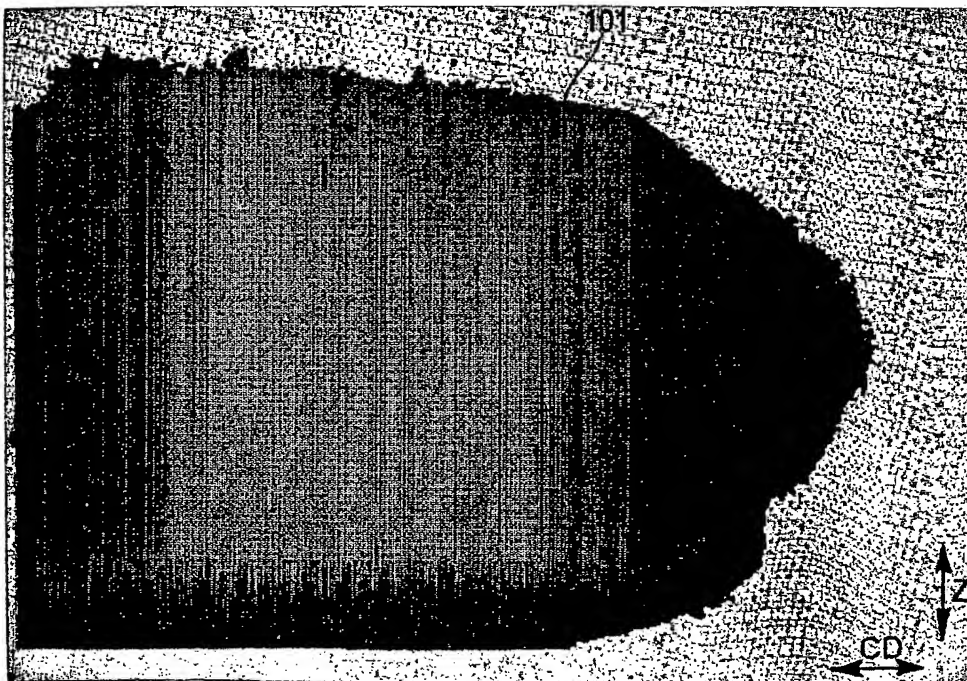


FIG. 12



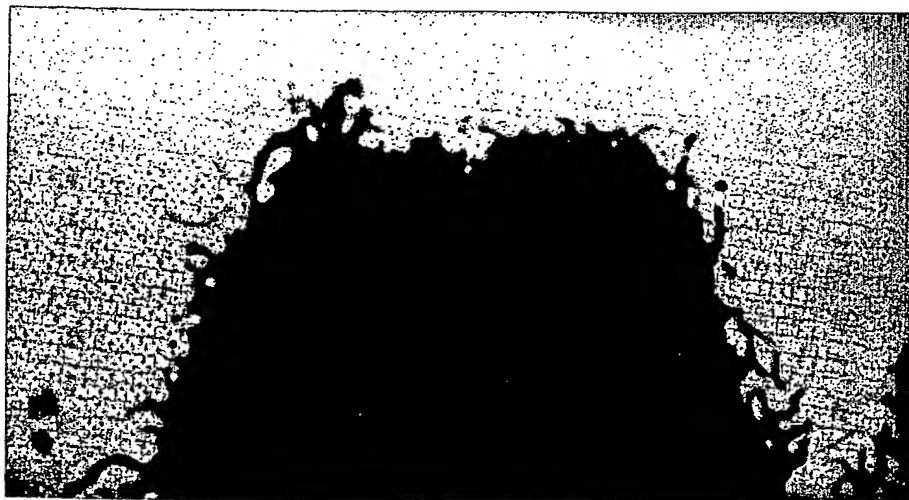


FIG. 14
PRIOR ART

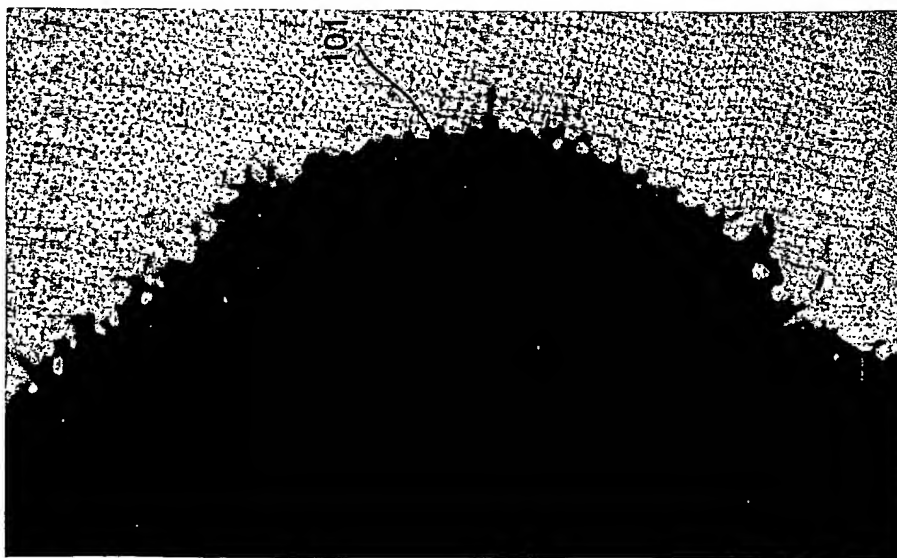


FIG. 13

FIG. 15

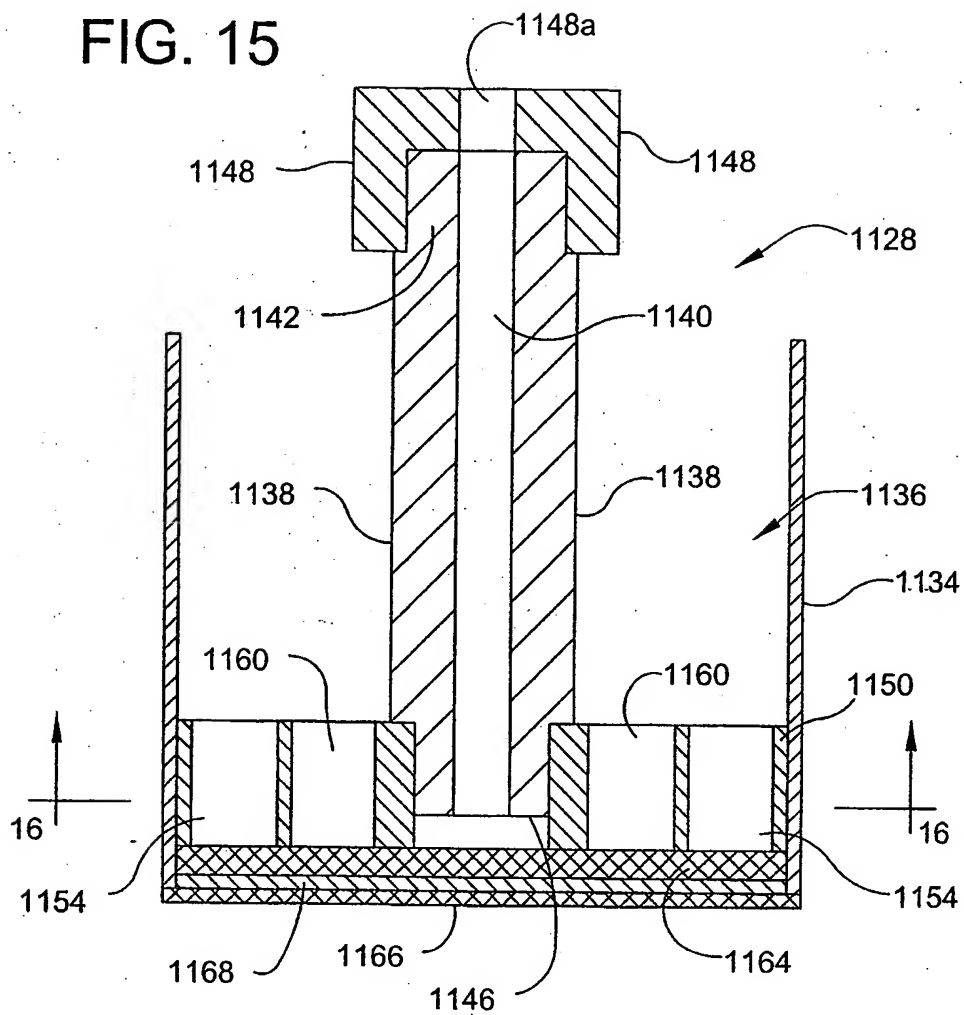


FIG. 16

